


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2009.09.30	Abel
A1	新增包裝方式	2010.04.01	AJ
A2	Refer to ECN20150502	2015.05.15	Abel

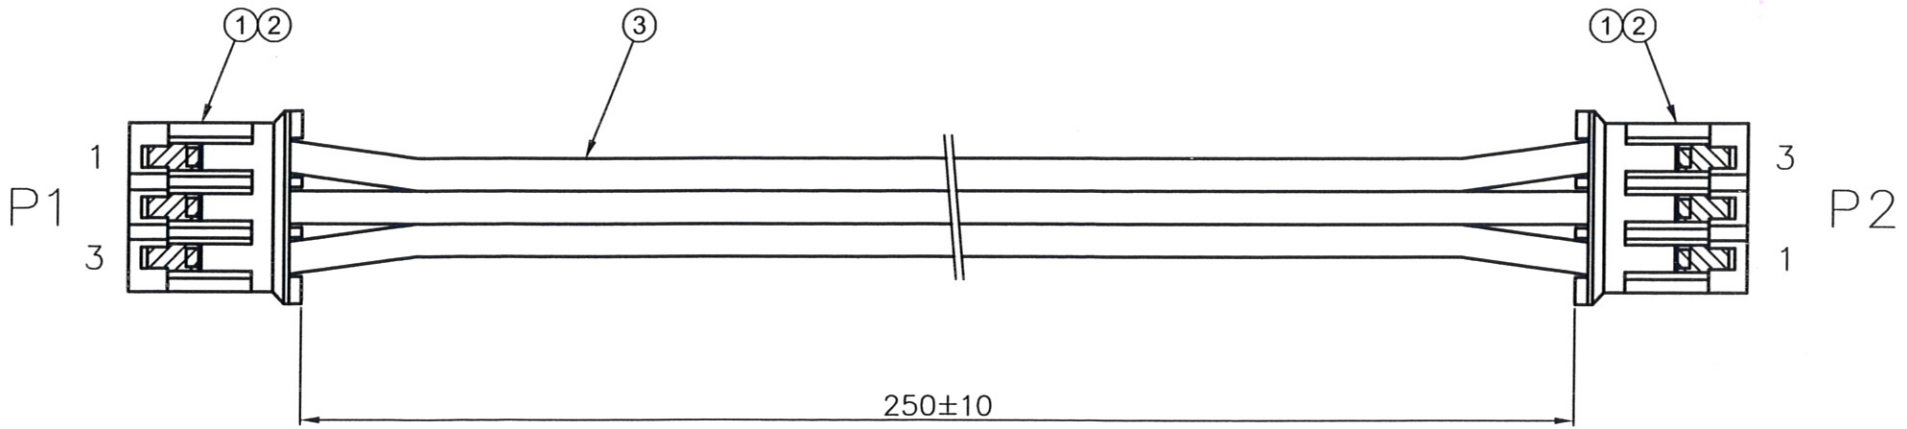

發行
104.5.15
文管中心

P1	Gray	P2	3
1	Gray	2	2
2	Gray	1	1
3	Gray		

PIN OUT

Electrical Properties
 1.100% Test(Open Short Miss Wire)
 2.Contact Resistance: 3Ω Maximum
 3.Insulation Resistance: 10MΩ Minimum
 4.Hi-Pot: 150V 10ms

包裝方式:
 一紮數量50Pcs
 一袋數量10紮(500Pcs)
 袋裝: 365x310mm

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED

PROJ.

TITLE: Flat Cable 2.00mm 3Pin To 2.00mm 3Pin UL2651#28 L=250mm

APR. C.F. Liao 20150515 PART NO. P0000000312D1 DWG NO. P0000000312D1

CHK. Michelle 20150515 UNITS: mm CUSTOMER DRAWING

DRA. Abel 20150515 SIZE: A4 SCALE FREE SHEET 1 / 1 REV A2 V

ITEM	PARTS NAME	SPECIFICATION STANDARD	Q'TY	REMARK
3	WIRE	Flat Cable 1.27mm UL2651 28AWG L=254mm Color:Ref. Pin Out	1PCS	.
2	TERMINAL	2.00mm Phosphor Bronze Tin Plated	6PCS	.
1	HOUSING	2.00mm 3Pin Nylon66 UL94V-0 Color:White	2PCS	.

MATERIAL LIST