
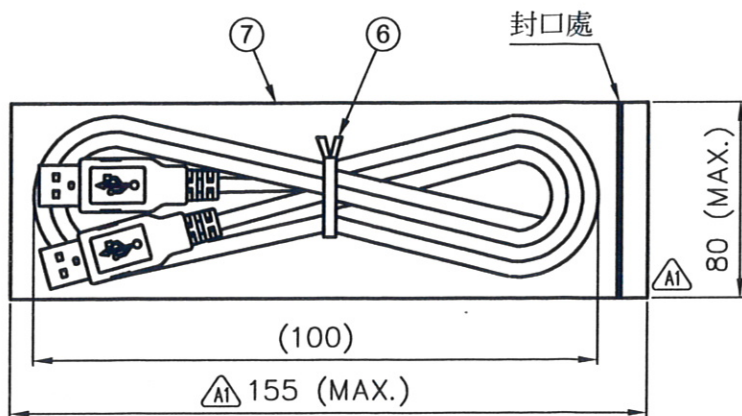


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2010.12.07	Abel
A1	S1104091 ECN20110512	2011.05.26	Abel
A2	Refer to ECN20140403	2014.05.02	Abel

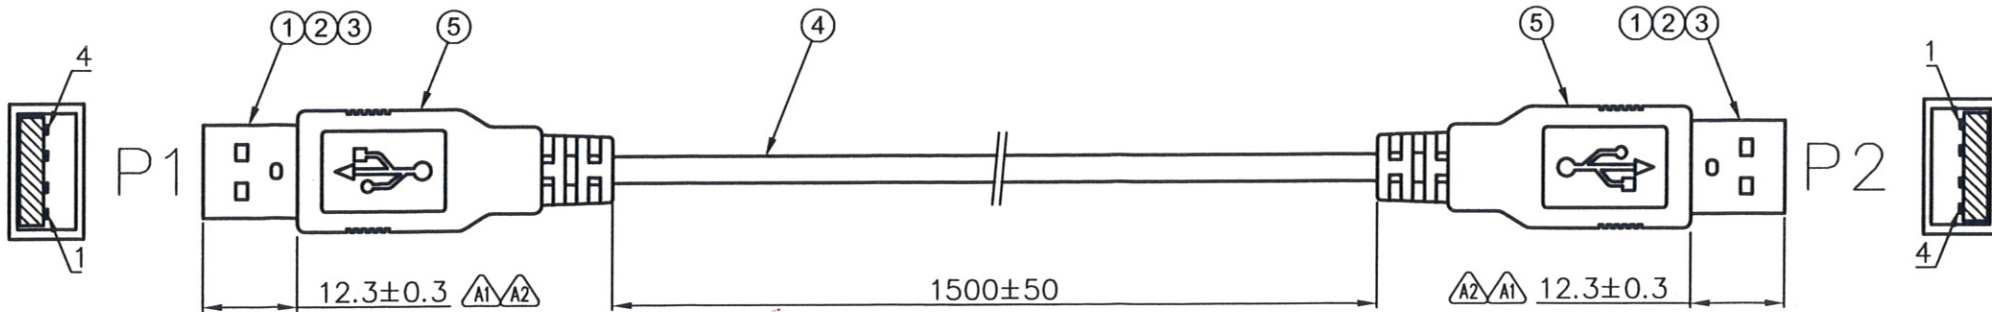

包裝示意圖

- Note: $\Delta 1 \Delta 2$
- 每50PCS包成一包
 - 附對應數量的UL標籤貼紙


- Electrical Properties
- 100% Test (Open Short Miss Wire)
 - Contact Resistance: 3 Ω Maximum
 - Insulation Resistance: 10M Ω Minimum
 - Hi-Pot: 300V 10ms



P1	Shell	Braid	Black	4	Green	3	White	2	Red	1	PIN OUT
P2	Shell	4	3	2	1						


ITEM	PARTS NAME	SPECIFICATION STANDARD	Q'TY	REMARK
7	PE BAG	W=155mm(Maximun) H=80mm(Maximum)	1PCS	
6	TIE	Color:Black	1PCS	
5	OVERMOLD	PVC45P Color:Black	10g	
4	CABLE	UL2725 #28x1P+#28x2C AEB(鍍鋁編) OD=4.0mm Black USB2.0	1PCS	
3	SHELL	USB A Male 後殼 Nickel Plated	2PCS	
2	SHELL	USB A Male 前殼 Nickel Plated	2PCS	
1	CONNECTOR	USB A Male Solder Type Color:White Terminal:前金後錫	2PCS	

MATERIAL LIST



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Cable USB A Male To USB A Male UL2725 #28x1P+#28x2C Black OD4.0mm L=1500mm	
.x± 0.35	x.± 2'	APR. C.F. Liao 20140502	PART NO. Q0000000138D0	DWG NO. Q0000000138D0
.xx± 0.25	.x'± 1'	CHK. Michelle 20140502	UNITS: mm	
.xxx± 0.15	.xx'± 0.5'	DRA. Abel 20140502	CUSTOMER DRAWING	
		SIZE: A4	SCALE: FREE	SHEET 1 / 1
			REV: A2	V