
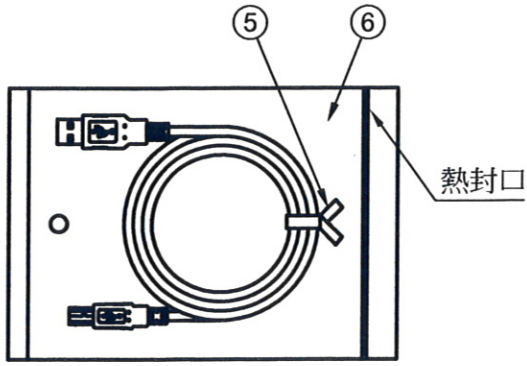


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Refer to MA20140305	2014.03.20	Abel

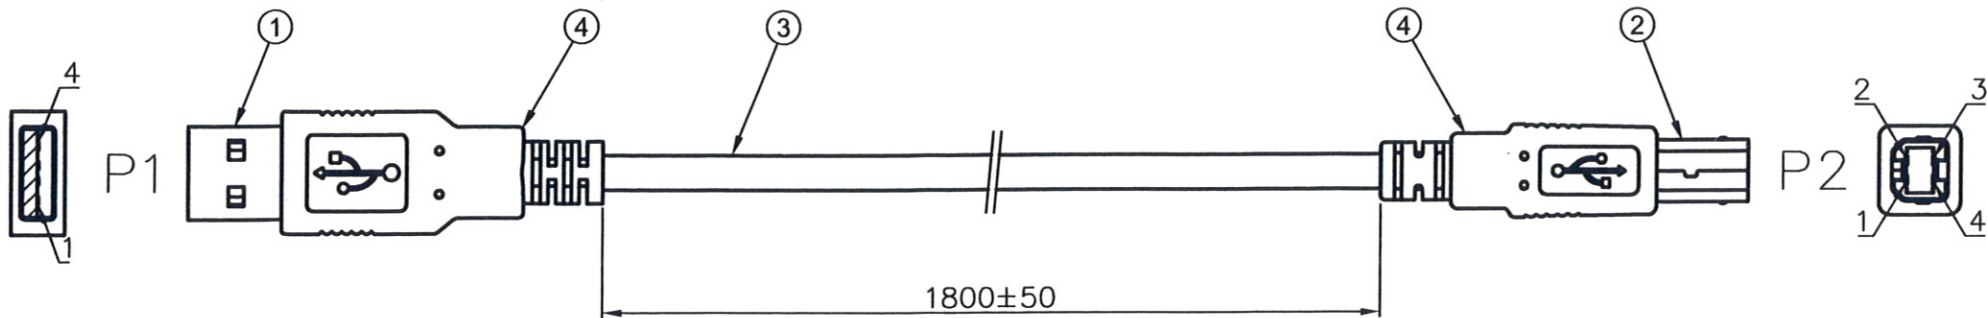


- Note:
1. 每條線以束線帶如圖所示繞好,並裝入PE袋內封口
 2. 每200PCS裝入已放置防水袋之紙箱內封裝
 3. 紙箱內需放置上下隔板

- Electrical Properties
- 1.100% Test(Open Short Miss Wire)
 - 2.Contact Resistance: 2Ω Maximum
 - 3.Insulation Resistance: 5MΩ Minimum
 - 4.Hi-Pot: 300V 10ms




P1	P2
Shell	Braid
4	Black
3	Green
2	White XX
1	Red
	PIN OUT

Packing



金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Cable USB AM 4P To USB BM 4P UL2725 #28x1P+#24x2C+AB OD=4.5mm L=1800mm	
.x± 0.35	.x'± 2'	APR. C.F. Liao 20140320	PART NO. Q0000000228D0	DWG NO. Q0000000228D0
.xx± 0.25	.x'± 1'	CHK. Michelle 20140320	UNITS: mm	
.xxx± 0.15	.xx'± 0.5'	DRG. Abel 20140320	CUSTOMER DRAWING	
		SIZE: A4	SCALE: FREE	SHEET 1 / 1
		REV: A0	V	

ITEM	PARTS NAME	SPECIFICATION	STANDARD	Q'TY	REMARK
6	BAG	PE BAG W/Hole		1PCS	.
5	TIE	Color:Black L=80mm		1PCS	.
4	MOLDING	PVC Gray		10g	.
3	CABLE	UL2725 28AWGx1P+24AWGx2C+AB(MAA) OD: 4.5mm Color:Gray871		1PCS	.
2	CONNECTOR	USB B Male Solder Type Gold Plated White Insulation Nickel Shell		1SET	.
1	CONNECTOR	USB A Male Solder Type Gold Plated White Insulation Nickel Shell		1SET	.
MATERIAL LIST					