
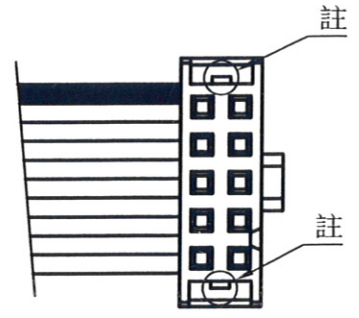


A3

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A1	Customer Request	2009.06.01	Abel
A2	Add Note.	2010.07.06	Abel
A3	Refer to ECN20130504	2013.10.01	Abel

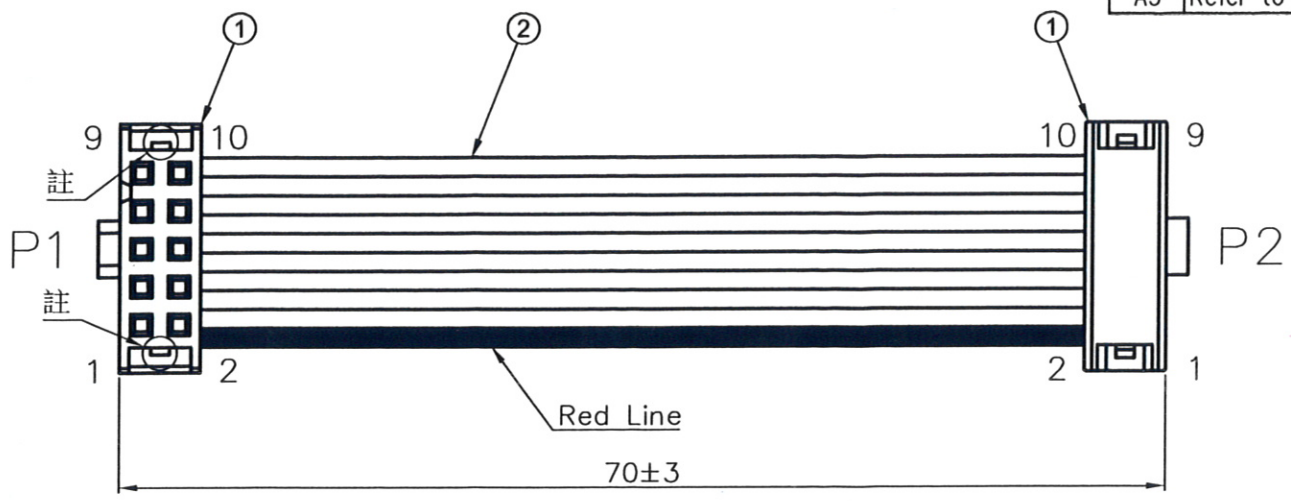

VIEW A




發行
102.9.30
文管中心

P1	Color	P2
10	Gray	10
9	Gray	9
8	Gray	8
7	Gray	7
6	Gray	6
5	Gray	5
4	Gray	4
3	Gray	3
2	Gray	2
1	Red	1


PIN OUT

Electrical Properties
 1. 100% Test (Open Short Miss Wire)
 2. Contact Resistance: 1Ω Maximum
 3. Insulation Resistance: 10MΩ Minimum
 4. Hi-Pot: 300V 10ms
 註: 外觀僅供參考, 不管控



金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO., LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Flat Cable 2.54mm 2x5Pin To 2.54mm 2x5Pin UL2651#28 L=70mm	
.xx± 0.25	.x*± 1'	APR. Jay 20131001	PART NO. P0000000249D1	DWG NO. P0000000249D1
.xxx± 0.15	.xx*± 0.5'	CHK. Michelle 20131001	CUSTOMER DRAWING	
		DRA. Abel 20131001	UNITS: mm	SIZE: A4
			SCALE FREE	SHEET 1 / 1
				REV A3

ITEM	PARTS NAME	SPECIFICATION STANDARD	Q'TY	REMARK
2	CABLE	Flat Cable UL2651#28x10C Color:Ref. Pin Out	1PCS	.
1	CONNECTOR	IDC 2.54mm 2x5Pin 二件式有鼻 Color:Black	2PCS	.

MATERIAL LIST