

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2011.04.20	Seven
A1	Release To ECN20130609	2013.06.19	Michelle

Specification
 1.Current Rating:1A
 2.Contact Resistance:30mΩ Maximum
 3.Insulation Resistance:1000MΩ MinimumV
 4.Dielectric Withstanding Voltage:AC 750V/Minute
 5.Operating Temperature:-55°C~+105°C

Material:
 1.Housing:Thermoplastic UL94V-0
 2.Contact Pin:Copper Alloy

Finish:
 1.Housing:Black
 2.Contact Pin:Bright Tin Plated
 Part No.:ED05388 XX 8 1 T K


Number Of Pin: 06~64
 Packing: T:Tube
 Housing Material: 8:PBT UL94V-0 Black
 Plating: 1:Bright Tin Plated Over Nickel

Poles	DIM.A	DIM.B	DIM.C	DIM.D	Poles	DIM.A	DIM.B	DIM.C	DIM.D
06	7.62	5.08	9.96	7.62	22	27.94	25.40	12.70	10.16
08	10.16	7.62			24	30.48	27.94		
14	17.78	15.24			24	30.48	27.94		
16	20.32	17.78			28	35.56	33.02		
18	22.86	20.32			32	40.64	38.10		
20	25.40	22.86			40	50.80	48.26	17.60	15.24
22	27.94	25.40			42	53.34	50.80		
24	30.48	27.94			48	60.96	58.42		
28	35.56	33.02	64	81.28	78.74	25.93	22.86		
32	40.64	38.10							

發行
 102.7.16
 文管中心

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: IC SOCKET 2.54mm 180° H=5.20 DIP Dual Row	
.x± 0.35	.x'± 2'	APR. Jay 20130619	PART NO. ED05388XX81TK	DWG NO. ED05388XX81TK
.xx± 0.25	.x'± 1'	CHK. Seven 20130619	UNITS: mm CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20130619	SIZE: A4	SCALE 2:1 SHEET 1 / 1 REV A1 V

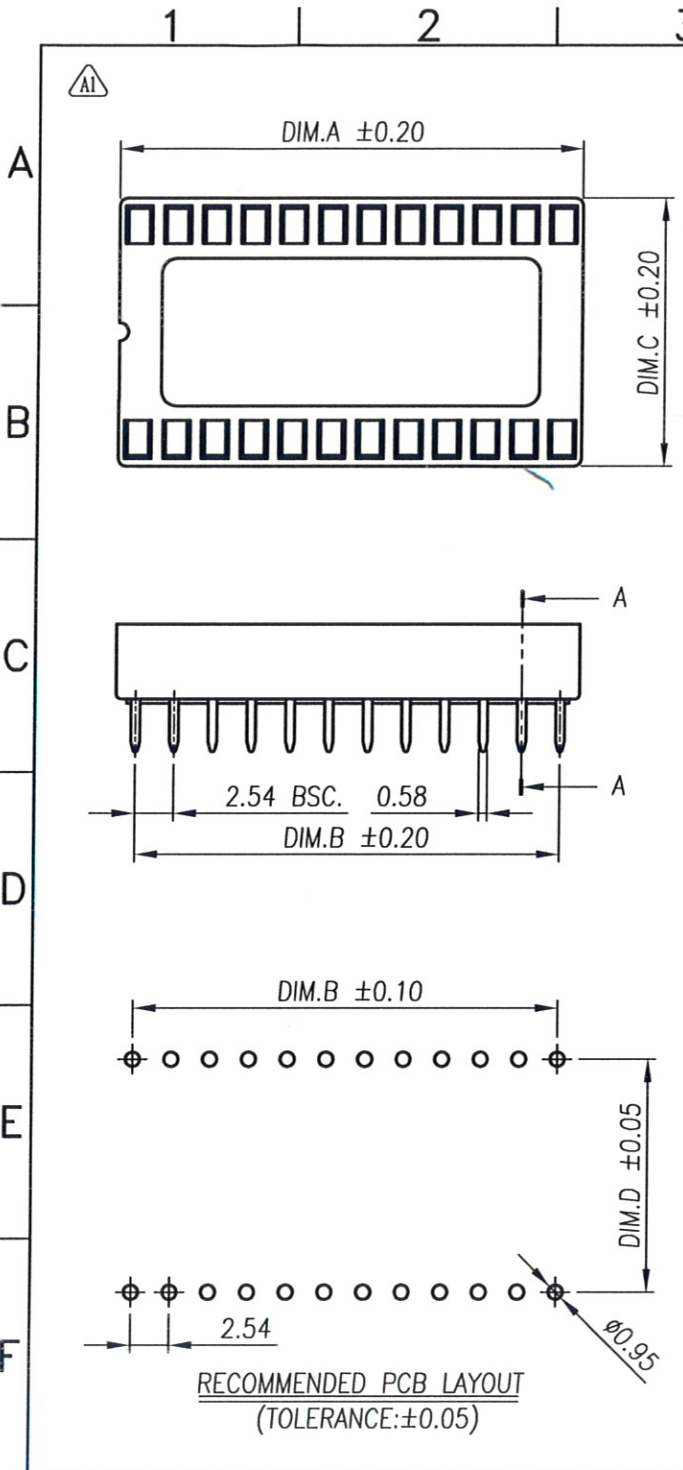

A
B
C
D
E
F

A
B
C
D
E
F

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8