


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Refer To MA20130405	2013.04.29	Michelle

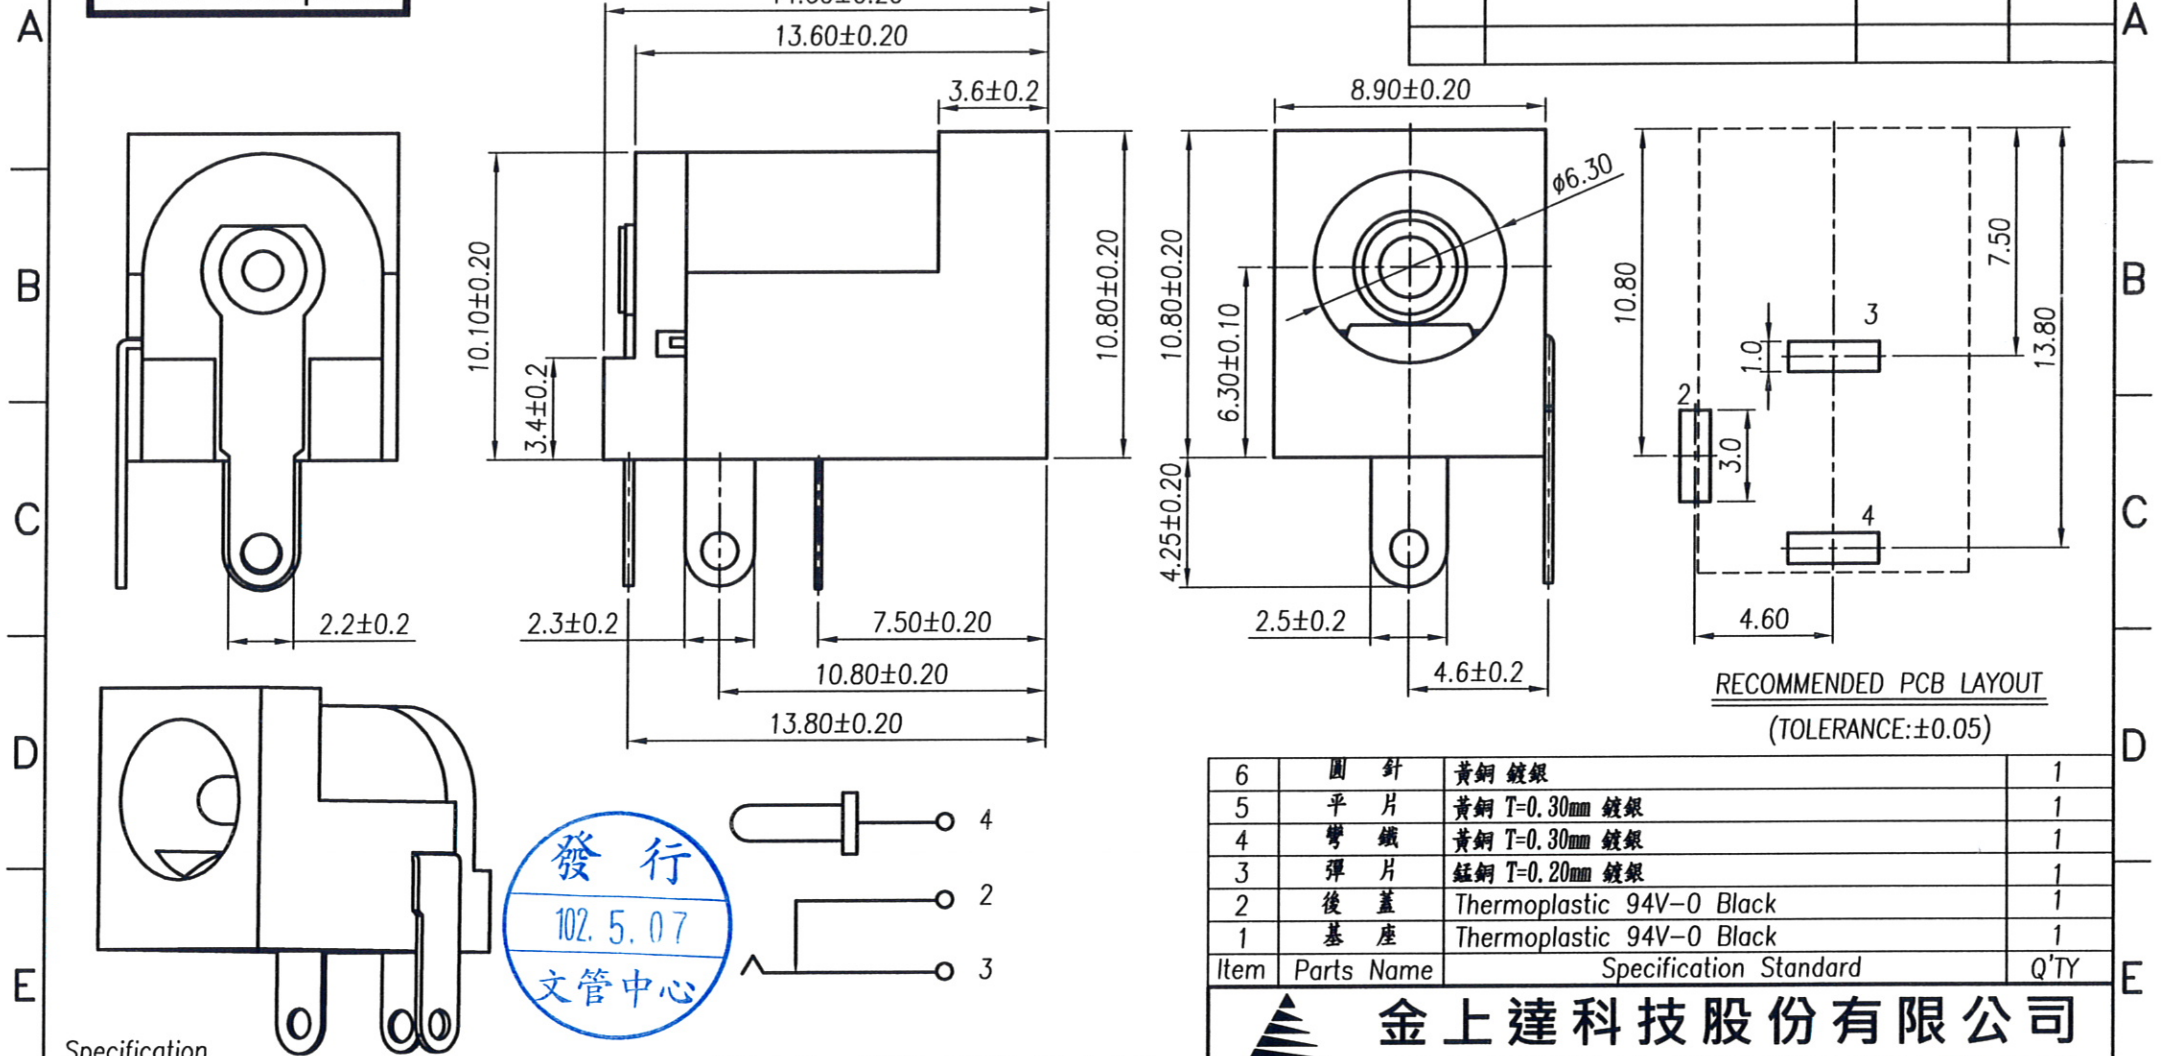

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.05)

- Specification
- 1.Current Rating:5A
 - 2.Voltage Rating:30V DC
 - 3.Contact Resistance:0.03mΩ Maximum
 - 4.Insulation Resistance:100MΩ Minimum At DC 250V
 - 5.Dielectric Withstanding Voltage:AC 500V/Minute
 - 6.Operating Temperature:-30°C~+70°C
 - 7.Insertion-Withdrawal force:3-20N
 - 8:Durability:5000 times.

9.Part No.: JCACM-20000-03 0 4 9
 Number of Pin 03 Packing 4:Bag Plating 9:Silver

6	圓針	黃銅 鍍銀	1
5	平片	黃銅 T=0.30mm 鍍銀	1
4	彎鐵	黃銅 T=0.30mm 鍍銀	1
3	彈片	錳鋼 T=0.20mm 鍍銀	1
2	後蓋	Thermoplastic 94V-0 Black	1
1	基座	Thermoplastic 94V-0 Black	1
Item	Parts Name	Specification Standard	Q'TY

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: DC POWER JACK φ2.0 90° DIP	
.x± 0.35	.x'± 2'	APR. Jay 20130429	PART NO. JCACM-20000-03049	DWG NO. JCACM-200-C-01
.xx± 0.25	.x'± 1'	CHK. Seven 20130429	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx'± 0.5'	DRAW. Michelle 20130429	SIZE: A4	SCALE 4:1

SHEET 1 / 1 REV A0 V