REV	MODIFICATION	DATE	DRAW
A0	Refer To S1301047	2013.02.18	Michelle

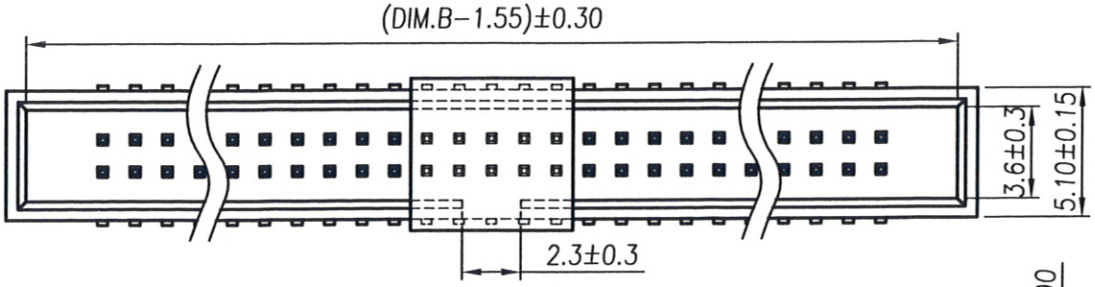

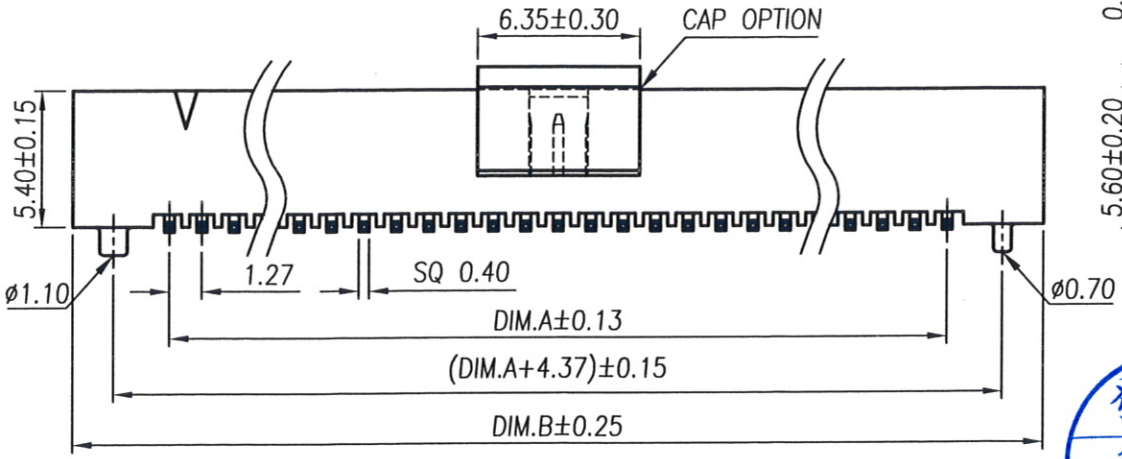



Specification
1.Current Rating:1A
2.Voltage Rating:12V AC Max.
3.Contact Resistance:20mΩ Max.
4.Insulation Resistance:1000MΩ Min.
5.Dielectric Withstanding Voltage:500V AC/Minute.
6.Operating Temperature:-40℃~+105℃
Material:
1.Housing:High Temperature thermoplastic UL94V-0
2.Contact Pin:Copper Alloy SQ=0.40mm
3.Cap:High Temperature thermoplastic UL94V-0
Finish:
1.Housing:Black
2.Contact Pin:Gold plated 0.6u" on contact area.
3.Cap:Black

Part No.: BHAAM-321 X 0-XX X X 5
- 0:Without Post / 1:With Post
- Number of Pin 10~A0(A0=100)
- 0:Without Cap / 1:With Cap
- Plating: 5:Gold plated 0.6u" min. on contact area.
- Packing: 2:Tube / 3:Tape&Reel

發行
102. 2. 22
文管中心

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
10	5.08	12.65	26	15.24	22.81	50	30.48	38.05
12	6.35	13.92	28	16.51	24.08	60	36.83	44.40
14	7.62	15.19	30	17.78	25.35	64	39.37	46.94
16	8.89	16.46	34	20.32	27.89	68	41.91	49.48
20	11.43	19.00	40	24.13	31.70	80	49.53	57.10
24	13.97	21.54	44	26.67	34.24	A0	62.23	69.80

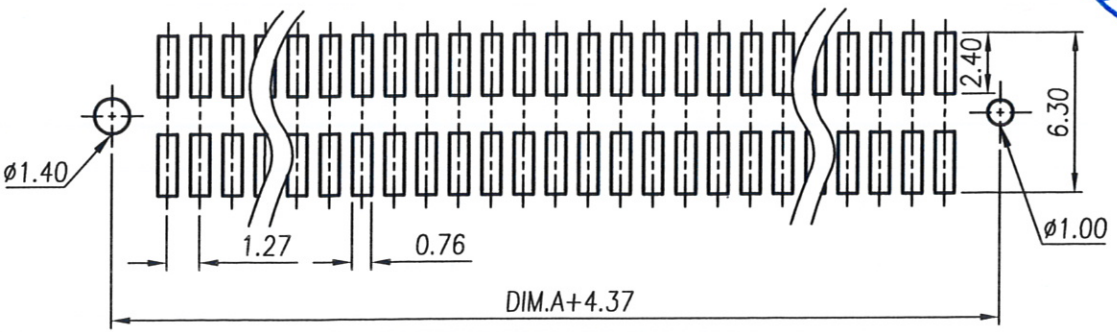

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

RoHS Compliant

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJ.	TITLE: BOX HEADER 1.27mm 180° SMT Dual Row H=5.40mm W=5.50mm	
.X± 0.35 / X.°± 2°	APR. Jay 20130218	PART NO. BHAAM-321X0-XXXX5	DWG NO. BHAAM-321-C-01
.XX± 0.25 / .X°± 1°	CHK. Seven 20130218	UNITS: mm	CUSTOMER DRAWING
.XXX± 0.15 / .XX°± 0.5°	DRA. Michelle 20130218	SIZE: A4 / SCALE 3:1	SHEET 1 / 1 / REV A0 / V