



1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2009.12.04	AJ
A1	Release To ECN20130707	2013.10.09	Michelle

A

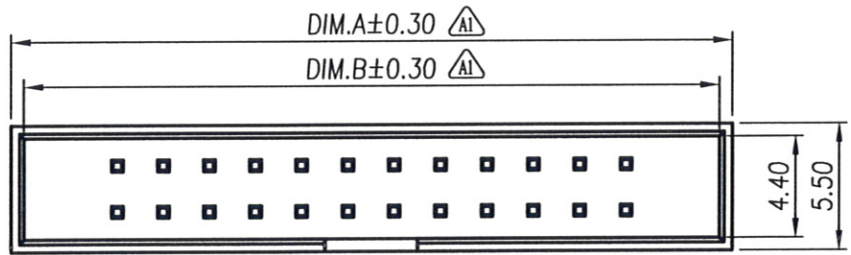

B

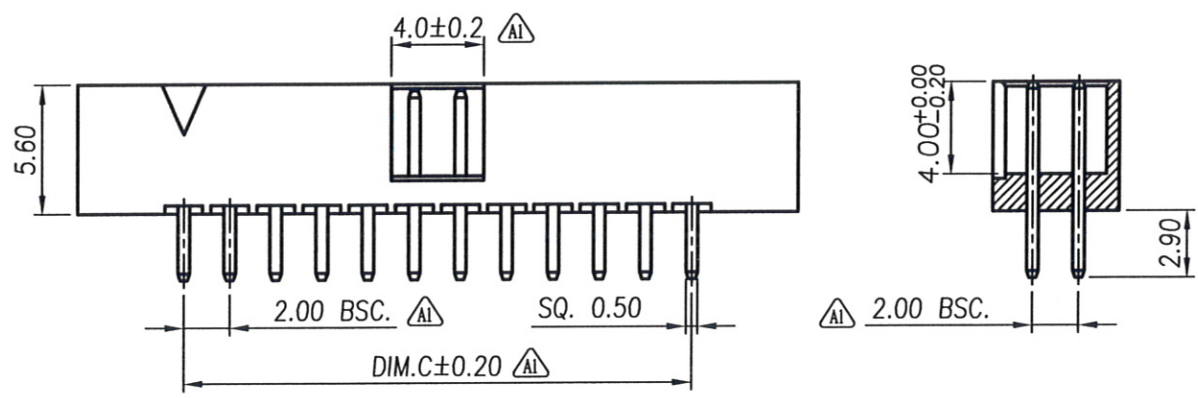


C

- Specification
- △AI 1.Current Rating:1A
 - △AI 2.Insulation Resistance:1000MΩ Min. At DC 500V
 - △AI 3.Dielectric Withstanding Voltage:800VAC/Minute
 - △AI 4.Operating Temperature:-55°C~+105°C

- Material:
- 1.Housing:High Temperature Thermoplastic UL94V-0
 - 2.Contact Pin:Copper Alloy SQ. Pin 0.50mm
- Finish:
- 1.Housing:Black
 - 2.Contact Pin:Gold Flash Over Nickel.

- △AI Part No.: ED07308 XX 4 3 B E
- Number Of Pin: 06~68
 - Packing B: Bag
 - Housing Material: 4:NY6T UL94V-0 Black
 - Plating: 3:Gold Flash Over Nickel

D

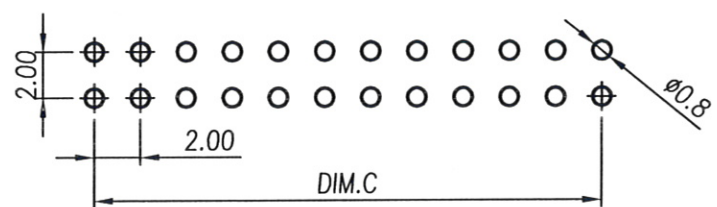

RECOMMENDED PCB LAYOUT
(TOLERANCE: ±0.05)




RoHS Compliant

E


△AI Pin	DIM.A	DIM.B	DIM.C	Pin	DIM.A	DIM.B	DIM.C	Pin	DIM.A	DIM.B	DIM.C
06	13.20	12.10	4.00	22	29.20	28.10	20.00	40	47.20	46.10	38.00
08	15.20	14.10	6.00	24	31.20	30.10	22.00	44	51.20	50.10	42.00
10	17.20	16.10	8.00	26	33.20	32.10	24.00	50	57.20	56.10	48.00
12	19.20	18.10	10.00	28	35.20	34.10	26.00	60	67.20	66.10	58.00
14	21.20	20.10	12.00	30	37.20	36.10	28.00	64	71.20	70.10	62.00
16	23.20	22.10	14.00	32	39.20	38.10	30.00	68	75.20	74.10	66.00
18	25.20	24.10	16.00	34	41.20	40.10	32.00				
20	27.20	26.10	18.00	36	43.20	42.10	34.00				

F



金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Box Header 2.00mm 180° H=5.60 DIP Dual Row	
.x± 0.35	x.*± 2'	APR. Joy 20131009	PART NO. ED07308XX43BE	DWG NO. ED07308XX43BE
.xx± 0.25	.x.*± 1'	CHK. Seven 20131009	UNITS: mm CUSTOMER DRAWING	
.xxx± 0.15	.xx.*± 0.5'	DRA. Michelle 20131009	SIZE: A4	SCALE 3:1
		SHEET 1 / 1		REV A1 V

1 2 3 4 5 6 7 8