


REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2010.04.15	AJ
A1	Release To ECN20130609	2013.06.19	Michelle

RoHS Compliant




Specification
 1.Current Rating:3A
 2.Contact Resistance:20mΩ Max.
 3.Insulation Resistance:1000MΩ Min. At DC 500V
 4.Dielectric Withstanding Voltage:1000 VAC Minute
 5.Operating Temperature:-25℃~+85℃ Δ

Material:
 1.Housing: Thermoplastic UL94V-0
 2.Contact Pin:Copper Alloy SQ. Pin 0.64mm
 Finish:
 1.Housing:Black
 2.Contact Pin:Gold Flash Over Nickel
 Part No.:ED05298 40 8 3 Y E
 Number of Pin 40 Packing Y:Tray
 Housing Material 8:PBT UL94V-0 Black Plating 3:Gold Flash Over Nickel

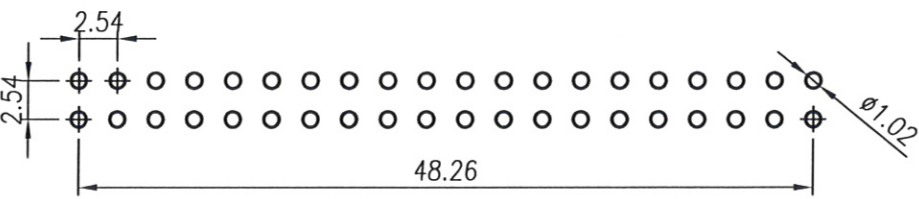

RECOMMENDED PCB LAYOUT
 (TOLERANCE:±0.05)



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Box Header 2.54mm 180' 2X20P H=8.80 DIP Void Pin20 Dual Row			
.x± 0.35	x.'± 2'	APR. Jay 20130619	PART NO. ED052984083YE		DWG NO. ED052984083YE	
.xx± 0.25	.x'± 1'	CHK. Seven 20130619	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20130619	SIZE: A4	SCALE 2:1	SHEET 1 / 1	
			REV A1	V		