

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2010.03.01	AJ
A1	Release To ECN20130605	2013.06.10	Michelle

**RoHS Compliant**

Specification

- 1. Current Rating: 3A AC/DC
- 2. Voltage Rating: 25V AC/DC
- 3. Contact Resistance: 20mΩ Max.
- 4. Insulation Resistance: 5000MΩ Min. At DC 500V
- 5. Dielectric Withstanding Voltage: 500 VAC/Minute
- 6. Operating Temperature: -25°C~+85°C

Material:

- 1. Housing: Thermoplastic UL94V-0
- 2. Contact Pin: Copper Alloy T=0.40mm

Finish:

- 1. Housing: Black
- 2. Contact Pin: Gold Flash Over Nickel.





Part No.: ED05187 XX 8 3 Y F

Number Of Pin  
04~80

Packing  
Y: Tray

Housing Material  
8: PBT UL94V-0 Black

Plating  
3: Gold Flash Over Nickel.

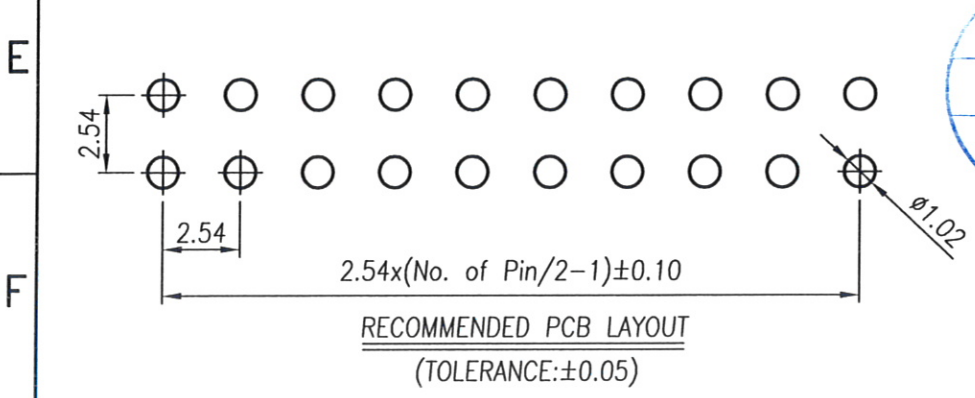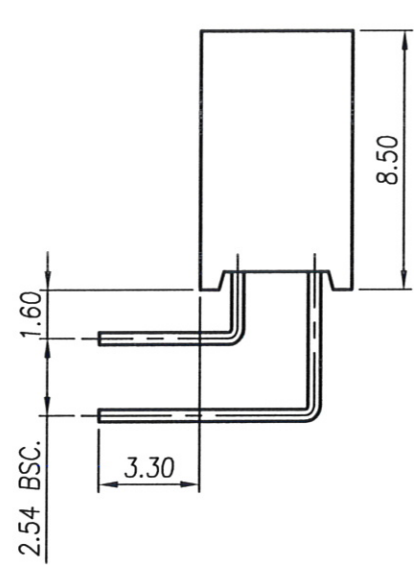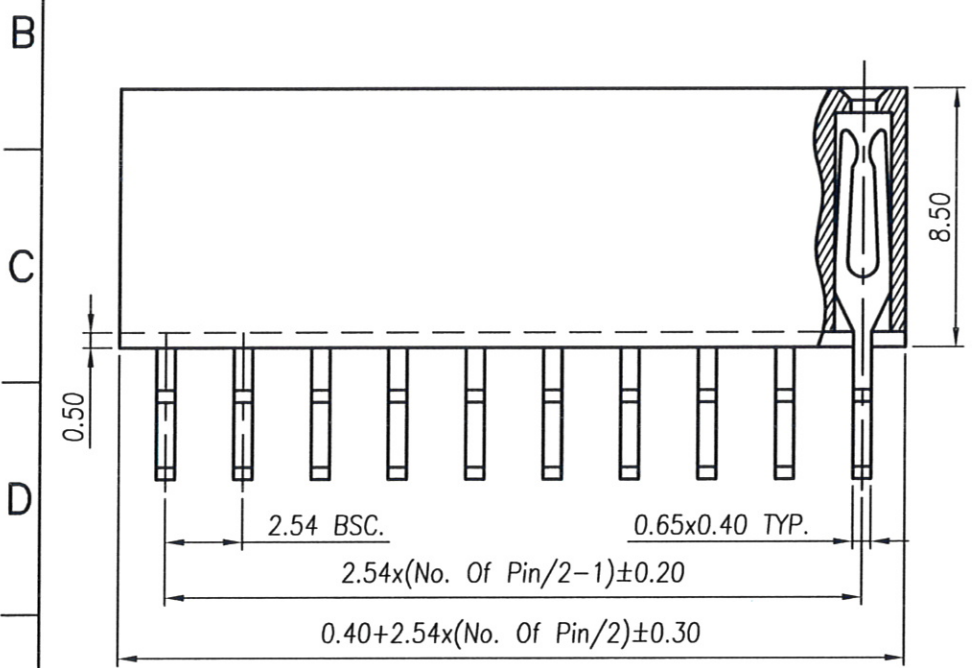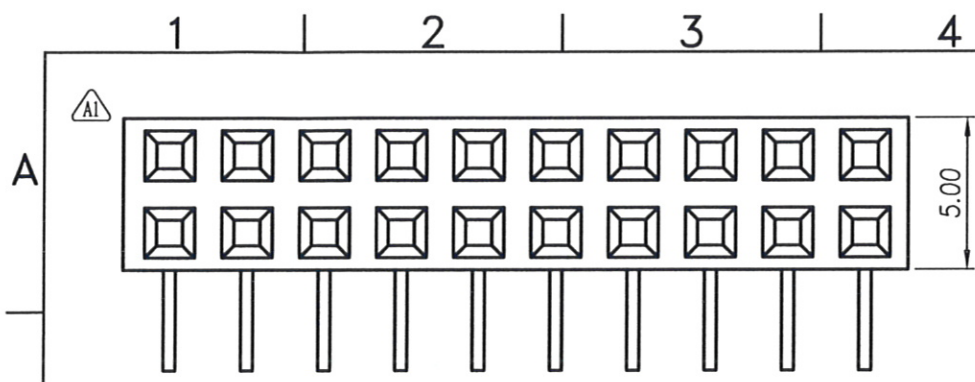

**金上達科技股份有限公司**  
GOLDENSUNDA TECHNOLOGY CO., LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Female Header 2.54mm 90° H=8.50 DIP Dual Row			
.x± 0.35	x.± 2'	APR. Jay 20130610	PART NO. ED05187XX83YF		DWG NO. ED05187XX83YF	
.xx± 0.25	.x.± 1'	CHK. Seven 20130610	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx.± 0.5'	DRW. Michelle 20130610	SIZE: A4	SCALE 4:1	SHEET 1 / 1	
			REV A1	V		