

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A1	Release To ECN20110107	2011.01.27	Ivy
A2	Release To ECN20130615	2013.06.29	Michelle
A3	Release To ECN20140305	2014.03.18	Michelle

Specification

- 1.Current Rating:1A
- 2.Contact Resistance:20mΩ Max.
- 3.Insulation Resistance:5000MΩ Min.
- 4.Dielectric Withstanding Voltage:AC500V/Minute
- 5.Operating Temperature:-40℃~+105℃

Material:

- △A3 1.Housing:High Temperature Thermoplastic UL94V-0 (H/F)
- 2.Contact Pin:Copper Alloy T=0.20mm

Finish:

- 1.Housing:Black
- △A3 2.Contact Pin:Gold Plated 0.60u" On Contact Area

Part No.: ED06609 XX 4 3 Y F

Number Of Pin  
02~40




Packing  
Y:Tray

Housing Material


Plating

- △A3 4:HTN UL94V-0 Black (H/F)

- △A3 3:Gold Plated 0.60u" On Contact Area

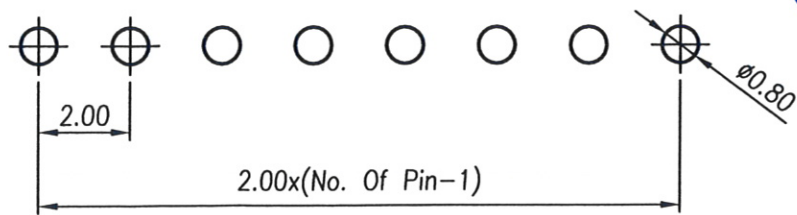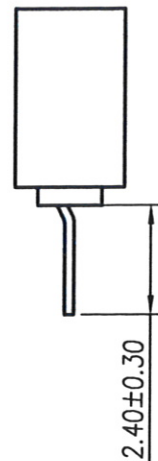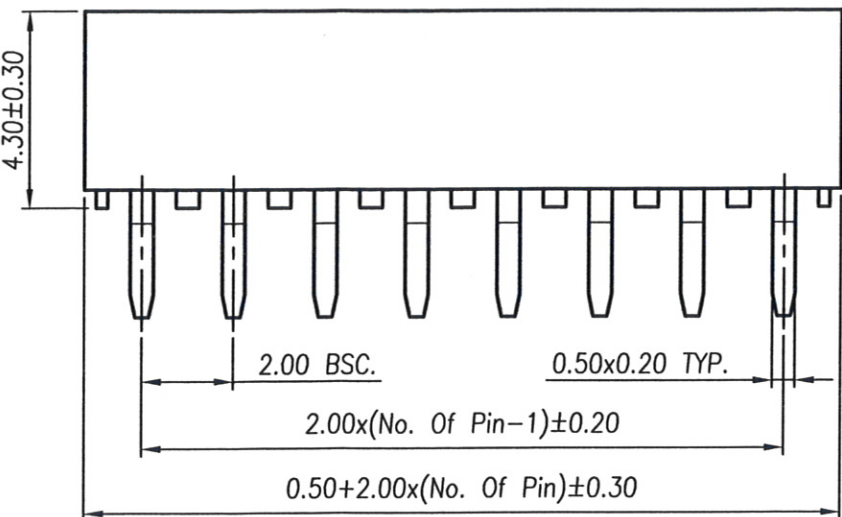

RECOMMENDED P.C.B LAYOUT  
(TOLERANCE:±0.05)

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Female Header 2.00mm 180° H=4.30 DIP Single Row						
			.x± 0.35		.x± 2'		APR. C.F. Liao 20140318	PART NO. ED06609XX43YF	DWG NO. ED06609XX43YF
.xx± 0.25		.x± 1'		CHK. Abel 20140318	UNITS: mm	CUSTOMER DRAWING			
.xxx± 0.15		.xx± 0.5'		DRA. Michelle 20140318	SIZE: A4	SCALE 6:1	SHEET 1 / 1	REV A3	V