

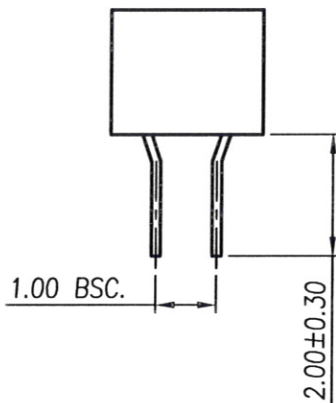


RoHS Compliant

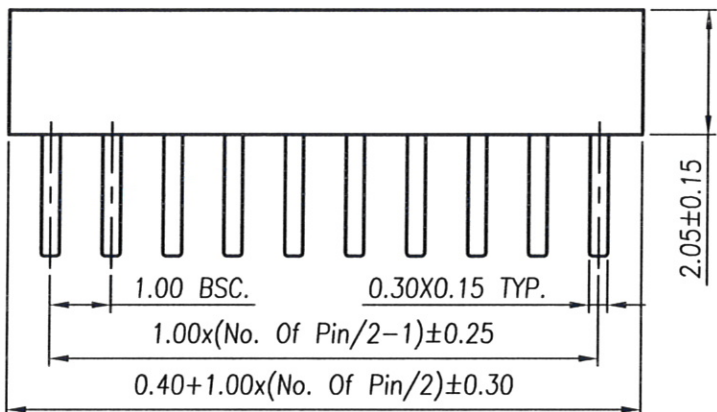

REV	MODIFICATION	DATE	DRAW
A0	Release To FAI20101108	2010.11.25	Ivy
A1	Releas To ECN20130506	2013.05.29	Michelle

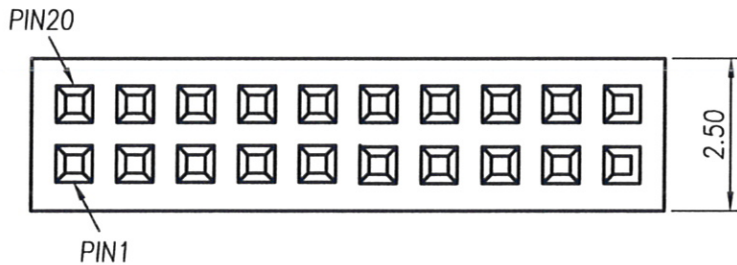

Specification

1. Current Rating: 1A AC/DC
2. Contact Resistance: 20mΩ Max.
3. Insulation Resistance: 1000MΩ Min.
4. Dielectric Withstanding Voltage: 500 VAC/Minute
5. Operating Temperature: -25°C ~ +85°C

Material:

1. Housing: High Temperature Thermoplastic UL94V-0
2. Contact Pin: Copper Alloy T=0.15mm

Finish:

1. Housing: Black
2. Contact Pin: Gold Flash Over Nickel.


Part No.: ED032B3 XX 4 3 T P

Number Of Pin
04~100(=A0)

Packing
T:Tube

Housing Material
4: NY6T UL94V-0 Black

Plating
3: Gold Flash Over Nickel.

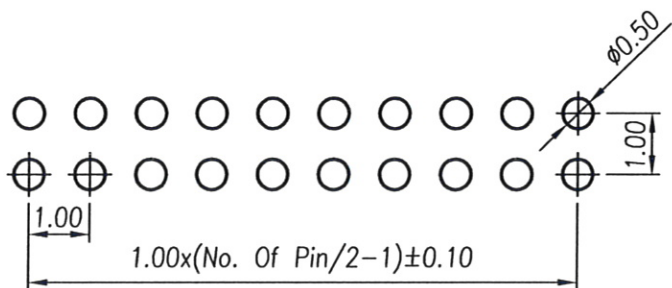

RECOMMENDED PCB LAYOUT
(TOLERANCE: ±0.05)



金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO., LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Female Header 1.00mm 180' H=2.05 DIP Dual Row			
.X ± 0.35	X' ± 2'	APR. Jay 20130529	PART NO. ED032B3XX43TP		DWG NO. ED032B3XX43TP	
.XX ± 0.25	.X' ± 1'	CHK. Seven 20130529	UNITS: mm	CUSTOMER DRAWING		
.XXX ± 0.15	.XX' ± 0.5'	DRAW. Michelle 20130529	SIZE: A4	SCALE: 8:1	SHEET 1 / 1	
			REV: A1	V		