

RoHS Compliant



REV	MODIFICATION	DATE	DRAW
A0	Refer To ECN20140515	2014.05.26	Michelle

Specification
 1.Current Rating:1A
 2.Voltage Rating:20V AC
 3.Contact Resistance:20mΩ Max.
 4.Insulation Resistance:3000MΩ Min.
 5.Dielectric Withstanding Voltage:AC500V/Minute
 6.Operating Temperature:-25℃~+85℃ (PBT)
 -40℃~+105℃ (NY6T/LCP)

Material:
 1.Housing:High Temperature or Thermoplastic UL94V-0
 2.Contact Pin:Copper Alloy SQ. Pin 0.50mm

Finish:
 1.Housing:Black
 2.Contact Pin:Gold Plated 0.60u" On Contact Area

Part No.: ED056 XX XX X 3 B F

See P/N Option
 Number of Pin
 02~40

Packing
 B:Bag





Housing Material
 4:HTN UL94V-0 Black H/F
 8:PBT UL94V-0 Black
 L:LCP UL94V-0 Black

Plating
 3:Gold Plated 0.60u" On Contact Area

P/N	DIM.A	DIM.B	DIM.C
ED05607XXX3BF	4.00	2.60	1.00
ED056G8XXX3BF	2.80	2.80	1.05

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Pin Header 2.00mm 90° H=2.00 DIP Single Row	
.x± 0.35	x.± 2'	APR. C.F.Liao 20140526	PART NO. ED056XXXXX3BF	DWG NO. ED056XXXXX3BF
.xx± 0.25	.x± 1'	CHK. Abel 20140526	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx± 0.5'	DRA. Michelle 20140526	SIZE: A4	SCALE 6:1
		SHEET 1 / 1		REV A0 V

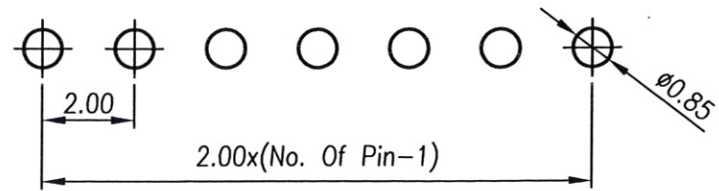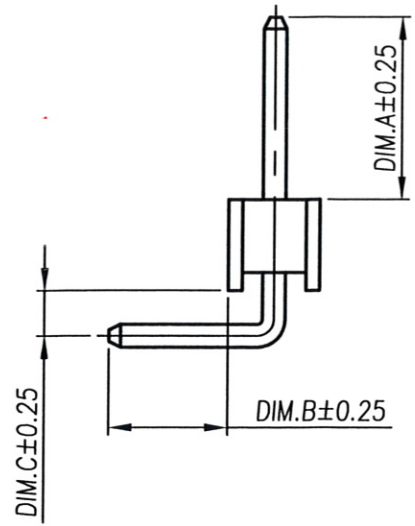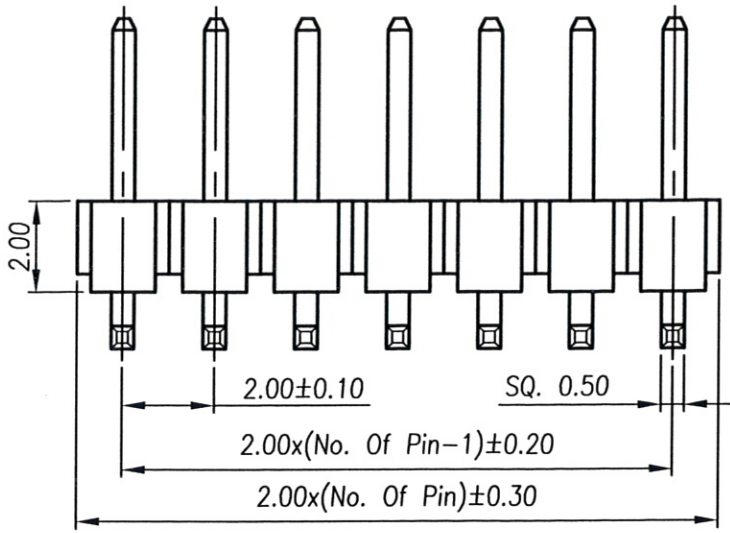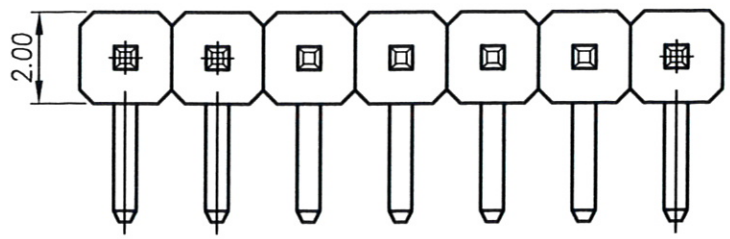

RECOMMENDED P.C.B LAYOUT
 (TOLERANCE:±0.05)