


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Refer To Production	2009.11.05	AJ
A1	Refer To ECN20130614	2013.06.25	Michelle
A2	Refer To ECN20140305	2014.03.18	Michelle

Specification
 1.Current Rating:1A AC/DC
 2.Voltage Rating:25V AC/DC
 3.Contact Resistance:20mΩ Max.
 4.Insulation Resistance:5000MΩ Min. At DC 500V
 5.Dielectric Withstanding Voltage:AC500V/Minute
 6.Operating Temperature:-25℃~+85℃ (For PBT)
 -40℃~+105℃ (For HTN) ^{A2}

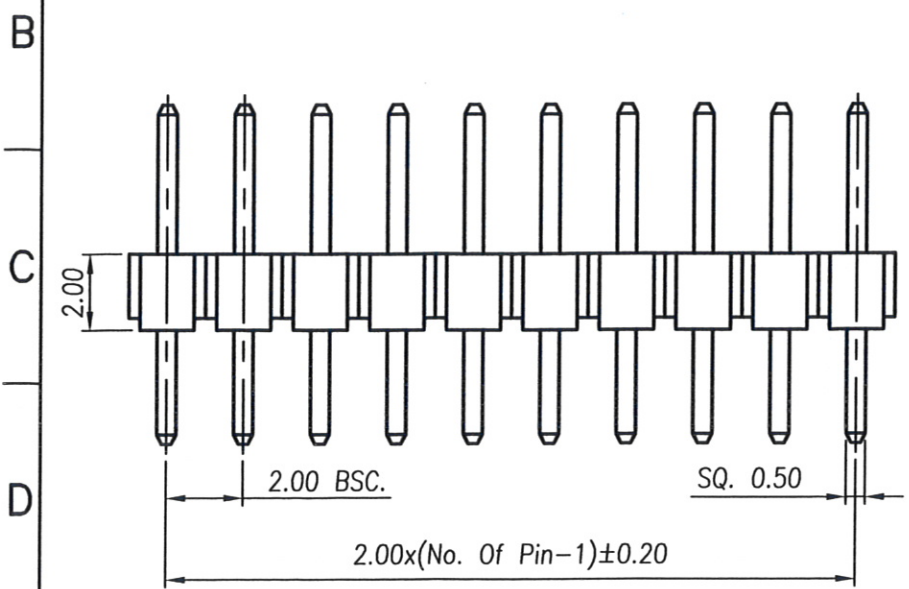


Material:
^{A2} 1.Housing:High Temperature Thermoplastic UL94V-0 (H/F)
 2.Contact Pin:Copper Alloy SQ. Pin 0.50mm
 Finish:
 1.Housing:Black
^{A2} 2.Contact Pin:Gold Plated 0.60u" On Contact Area

Part No.:ED05647 XX X 3 B F
 Number Of Pin: 02~40
 Packing: B:Bag

Housing Material:
^{A2} 4:HTN UL94V-0 Black (H/F)
 8:PBT UL94V-0 Black
 Plating:
^{A2} 3:Gold Plated 0.60u" On Contact Area

P/N	DIM.A	DIM.B	DIM.C
ED05647XXX3BF	8.80	3.80	3.00

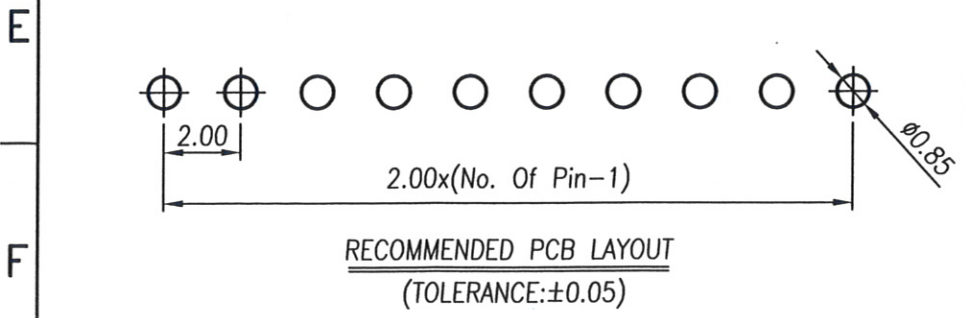

發行
103.3.18
文管中心

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Pin Header 2.00mm 180° H=2.00 DIP Single Row			
.X± 0.35	.X'± 2'	APR. C.F. Liao 20140318	PART NO. ED05647XXX3BF		DWG NO. ED05647XXX3BF	
.XX± 0.25	.X'± 1'	CHK. Abel 20140318	UNITS: mm	CUSTOMER DRAWING		
.XXX± 0.15	.XX'± 0.5'	DRA. Michelle 20140318	SIZE: A4	SCALE 5:1	SHEET 1 / 1	
			REV A2	V		