

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2010.01.21	AJ
A1	Release To ECN20130407	2013.05.09	Michelle
A2	Release To ECN20140305	2014.03.18	Michelle

Specification

1. Current Rating: 1A
2. Voltage Rating: 125V AC/DC
3. Contact Resistance: 20mΩ Max.
4. Insulation Resistance: 1000MΩ Min. At DC 500V
5. Dielectric Withstanding Voltage: AC500V/Minute
6. Operating Temperature: -40°C ~ +105°C

Material:

1. Housing: High Temperature Thermoplastic UL94V-0 (H/F) $\Delta 2$
2. Contact Pin: Copper Alloy SQ. Pin 0.40mm

Finish:

1. Housing: Black
2. Contact Pin: Gold Plated 0.60u" On Contact Area

Part No.: ED00682 XX 4 3 B F





Number Of Pin
06~100(=A0)

Packing
B: Bag

Housing Material
 $\Delta 2$ 4: HTN UL94V-0 Black (H/F)

Plating
3: Gold Plated 0.60u" On Contact Area

P/N	DIM.A	DIM.B	DIM.C
ED00682XX43BF	3.00	3.00	2.50

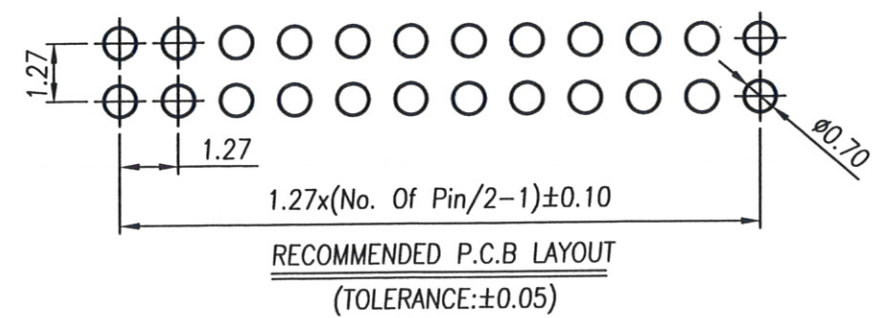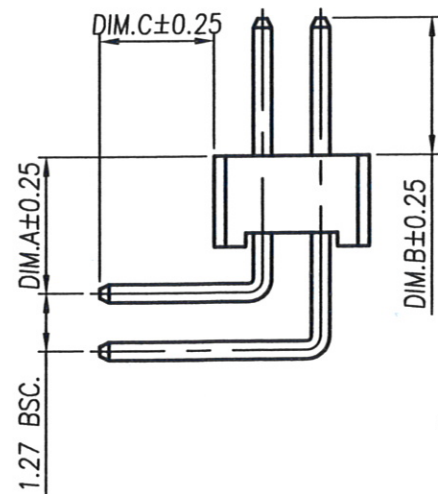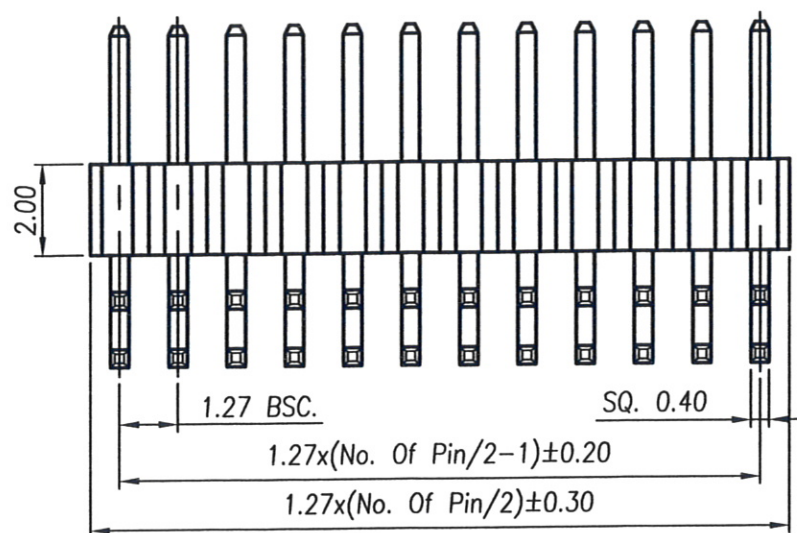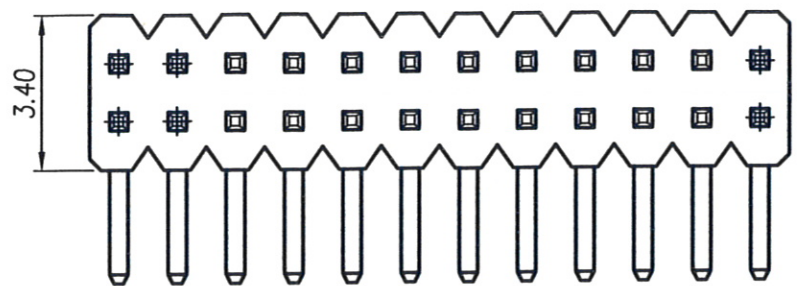

發行
103. 3. 18
文管中心

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO., LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Pin Header 1.27mm 90° H=2.00 DIP Dual Row	
.x±0.35	x.*2'	APR. C.F. Liao 20140318	PART NO. ED00682XX43BF	DWG NO. ED00682XX43BF
.xx±0.25	.x.*1'	CHK. Abel 20140318	UNITS: mm	CUSTOMER DRAWING
.xxx±0.15	.xx.*0.5'	DRA. Michelle 20140318	SIZE: A4	SCALE 6:1
		SHEET 1 / 1		REV A2 V