


REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.09.04	Abel
A1	Release To ECN20130307	2013.03.27	Seven

RoHS Compliant

發行
102.3.28
文管中心

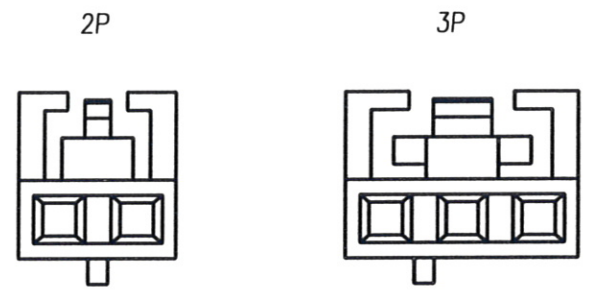

Note1: DIM.B Tolerance
02~10P->±0.25 ; 11~15P->±0.30 ; 16P~25P->±0.40

Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B
02	2.54	5.20	10	22.86	25.60	18	43.18	46.00
03	5.08	7.80	11	25.40	28.10	19	45.72	48.50
04	7.62	10.30	12	27.94	30.70	20	48.26	51.10
05	10.16	12.90	13	30.48	33.20	21	50.80	53.60
06	12.70	15.40	14	33.02	35.80	22	53.34	56.20
07	15.24	18.00	15	35.56	38.30	23	55.88	58.70
08	17.78	20.50	16	38.10	40.90	24	68.42	61.20
09	20.32	23.10	17	40.64	43.40	25	60.96	63.80

Specification
 1.Current Rating:2.5A
 2.Voltage Rating:250V (AC)
 3.Contact Resistance:30mΩ Max.
 4.Insulation Resistance:1000MΩ Min.
 5.Withstand Voltage:800V AC/Minute
 6.Operating Temperature:-25°C~+85°C
 Material:
 1.Housing:Thermoplastic UL94V-0
 Finish:
 1.Housing:Black

Part No.: BC03810 XX 7 3 B 8
 Number of Pin 02~25
 Housing Material 7:PBT UL94V-0
 Packing B:Bag
 Housing Color 3:Black

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TITLE: Wire To Board Housing 2.54mm Male Single Row

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJ.	APR. Jay 20130327	PART NO. BC03810XX73B8	DWG NO. BC03810XX73B8
.x± 0.35	x:± 2'	CHK Michelle 20130327	UNITS: mm	CUSTOMER DRAWING
.xx± 0.25	.x:± 1'	DRA Seven 20130327	SIZE: A4	SCALE 4:1
.xxx± 0.15	.xx:± 0.5'		SHEET 1 / 1	REV A1 V