



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.08.14	Abel
A1	Release To ECN20130307	2013.03.27	Seven

Specification

- 1.Current Rating:2.5A
- 2.Voltage Rating:250V AC/DC
- 3.Insulation Resistance:1000MΩ Min.
- 4.Withstand Voltage:800V AC/Minute
- 5.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0

Finish:

1.Housing:Black

Part No.: BC04101 XX 7 3 B 8

Number of Pin 02~15


Packing B:Bag

Housing Material 7:PBT UL94V-0

Housing Color 3:Black








02P



03P



04~15P

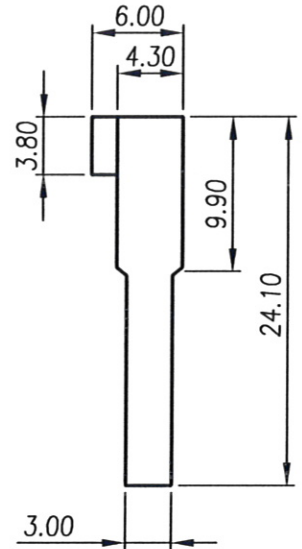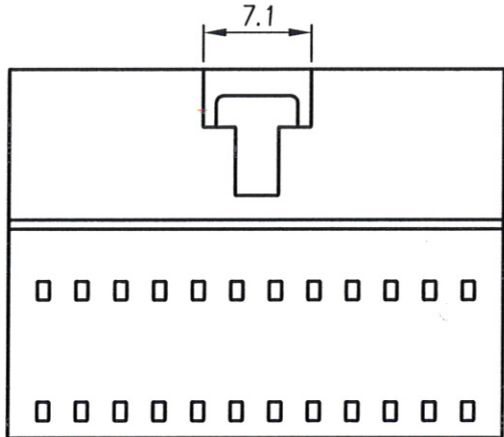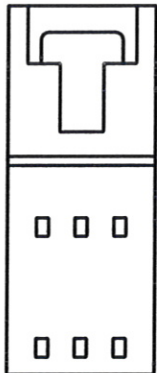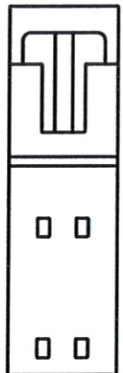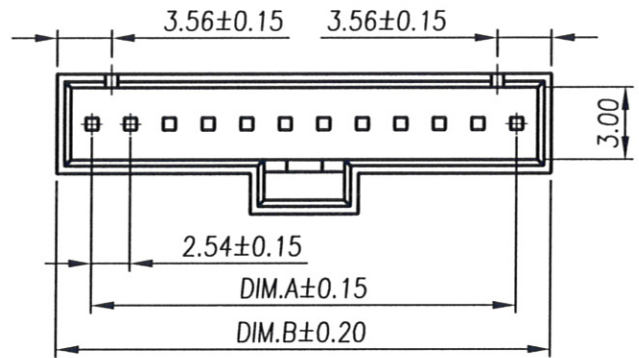

Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B
02	2.54	7.1	09	20.32	24.9
03	5.08	9.7	10	22.86	27.4
04	7.62	12.2	11	25.40	30.0
05	10.16	14.7	12	27.94	32.5
06	12.70	17.3	13	30.48	35.0
07	15.24	19.8	14	33.02	37.6
08	17.78	22.4	15	35.56	40.1

**金上達科技股份有限公司**  
**GOLDENSUNDA TECHNOLOGY CO.,LTD**

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 2.54mm Female	
.x± 0.35	x.*± 2'	APR. Jay 20130327	PART NO. BC04101XX73B8	DWG NO. BC04101XX73B8
.xx± 0.25	.x*± 1'	CHK. Michelle 20130327	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx*± 0.5'	DRA. Seven 20130327	SIZE: A4	SCALE 2:1
			SHEET 1 / 1	REV A1 V