

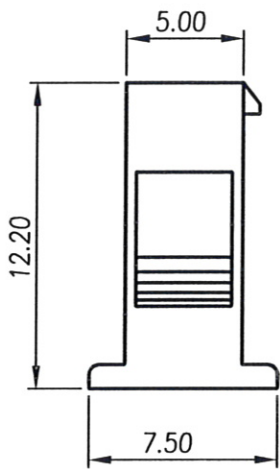


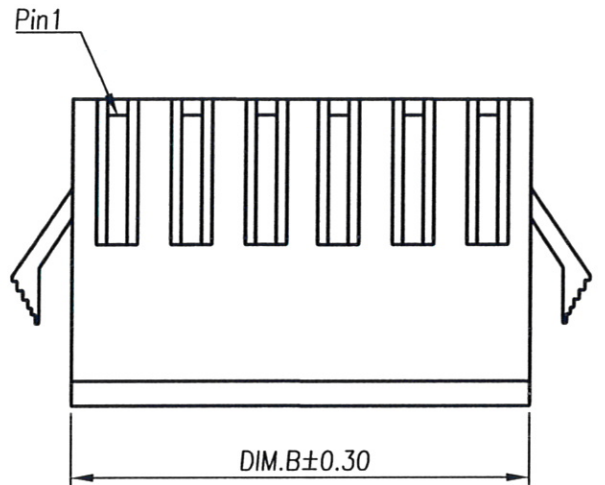

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.04.27	AJ
A1	Release To ECN20130307	2013.03.27	Seven

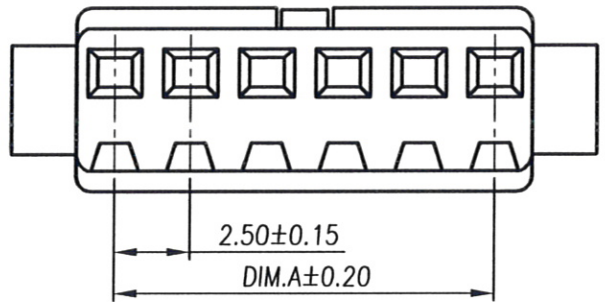

Specification

- 1.Current Rating:3A
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstand Voltage:800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0


Finish:

1.Housing:Black


Part No.: BC05115 XX 1 3 B 3

Number of Pin 02~12  
Packing B:Bag

Housing Material 1:PA66 UL94V-0  
Housing Color 3:Black




PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.50	5.50	08	17.50	20.50
03	5.00	8.00	09	20.00	23.00
04	7.50	10.50	10	22.50	25.50
05	10.00	13.00	11	25.00	28.00
06	12.50	15.50	12	27.50	30.50
07	15.00	18.00			



## 金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 2.50mm Male		
.x± 0.35	x.'± 2'	APR. Jay 20130327	PART NO. BC05115XX13B3	DWG NO. BC05115XX13B3	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130327	UNITS: mm	CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130327	SIZE: <b>A4</b>	SCALE 4:1	SHEET 1 / 1
			REV A1	V	