




1 2 3 4 5 6 7 8

REV	MODIFICATION	DATE	DRAW
A1	Release To ECN20130308	2013.03.25	Seven
A2	Release To ECN20150312	2015.03.24	Seven
A3	Release To ECN20150604	2015.06.09	Michelle

A

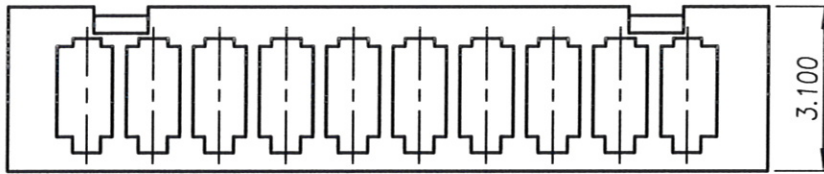

B

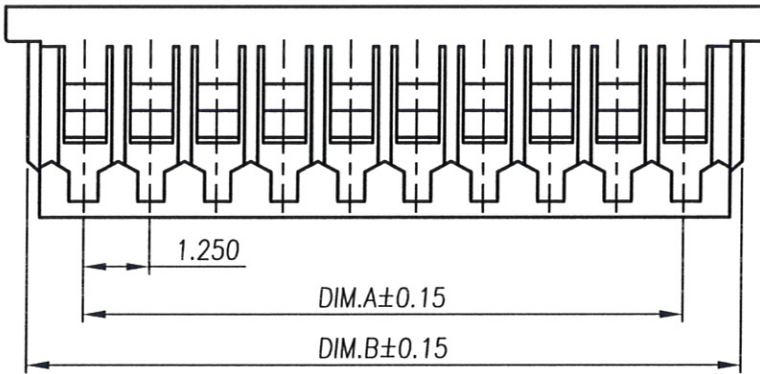

RoHS Compliant

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:125V AC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:100MΩ Min. At DC 500V
- 5.Dielectric Withstanding Voltage:AC250V/Minute
- 6.Operating Temperature:-40°C~+85°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0

Finish:

1.Housing:White

A3 Use With:Terminal:CC0760000P1A2

Part No.:BC07600 XX C 2 B 2

No. Of Pin
02~15

Packing
B:Bag

A2 Housing Material

C:PA66 UL94V-0 White H.F

C

D

E

F

Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B
02	1.25	4.25	09	10.00	13.00
03	2.50	5.50	10	11.25	14.25
04	3.75	6.75	11	12.50	15.50
05	5.00	8.00	12	13.75	16.75
06	6.25	9.25	13	15.00	18.00
07	7.50	10.50	14	16.25	19.25
08	8.75	11.75	15	17.50	20.50



TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board & Wire Housing 1.25mm Male Single Row		
.x± 0.35	x.± 2'	APR. C.F.Liao 20150609	PART NO. BC07600XXC2B2	DWG NO. BC07600XXC2B2	
.xx± 0.25	.x.± 1'	CHK. Abel 20150609	UNITS: mm CUSTOMER DRAWING		
.xxx± 0.15	.xx.± 0.5'	DRA Michelle 20150609	SIZE: A4	SCALE 7:1	SHEET 1 / 1 REV A3 V

1 2 3 4 5 6 7 8