
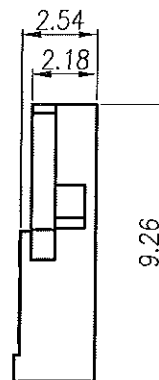
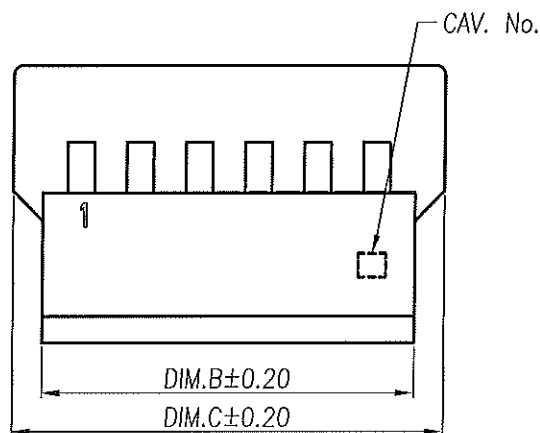


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Refer to MA20150401	2015.04.28	Michelle

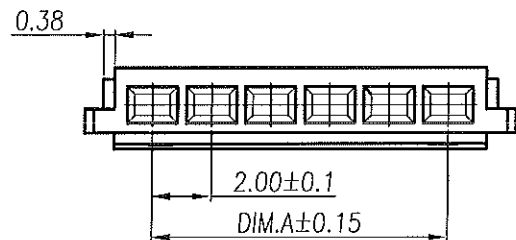

Specification

- 1.Current Rating:2A AC/DC
- 2.Voltage Rating:100V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min.
- 5.Withstand Voltage:AC500V/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0

Finish:

1.Housing:White

Use With:CCA130000PXA4

Part No.:BCA1300 XX 1 2 5 3

No. Of Pin
02~11

Packing
5:Bag(1000pcs/Bag)

Housing Material
1:NY66 UL94V-0

Pin	DIM.A	DIM.B	DIM.C	Pin	DIM.A	DIM.B	DIM.C
02		4.60	6.60	07	12.00	14.60	16.60
03	4.00	6.60	8.60	08	14.00	16.60	18.60
04	6.00	8.60	10.60	09	16.00	18.60	20.60
05	8.00	10.60	12.60	10	18.00	20.60	22.60
06	10.00	12.60	14.60	11	20.00	22.60	24.60



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Wire Housing 2.00mm Male Singl Row	
.X± 0.35	X'± 2'	APR. C.F. Liao 20150428	PART NO. BCA1300XX1253	DWG NO. BCA1300XX1253
.XX± 0.25	.X'± 1'	CHK. Abel 20150428	UNITS: mm CUSTOMER DRAWING	
.XXX± 0.15	.XX'± 0.5'	DRA. Michelle 20150428	SIZE: A4	SCALE FREE SHEET 1 / 1 REV A0 V