


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Refer to MA20150401	2015.04.28	Michelle


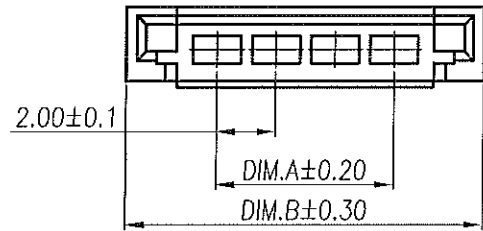


Specification
 1.Current Rating:2A AC/DC
 2.Voltage Rating:100V AC/DC
 3.Contact Resistance:20mΩ Max.
 4.Insulation Resistance:1000MΩ Min.
 5.Withstand Voltage:AC500V/Minute
 6.Operating Temperature:-25°C~+85°C

Material:
 1.Housing:Thermoplastic UL94V-0
 Finish:
 1.Housing:White
 Use With:CCA130100PXA4

Part No.: BCA1301 XX 1 2 5 3
 No. Of Pin: 02~11
 Packing: 5:Bag(1000Pcs/Bag)

Housing Material
 1:NY66 UL94V-0

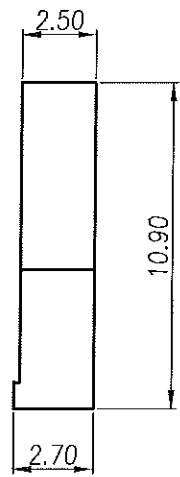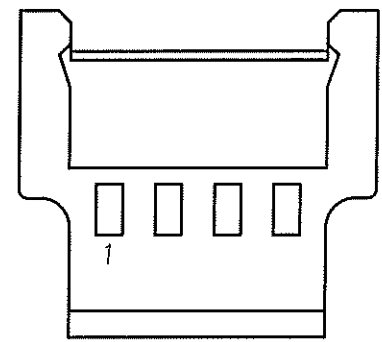

Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B
02	2.00	8.20	07	12.00	18.20
03	4.00	10.20	08	14.00	20.20
04	6.00	12.20	09	16.00	22.20
05	8.00	14.20	10	18.00	24.20
06	10.00	16.20	11	20.00	26.20

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Wire Housing 2.00mm Female Single Row	
.x± 0.35	x.'± 2'	APR. C.F. Liao 20150428	PART NO. BCA1301XX1253	DWG NO. BCA1301XX1253
.xx± 0.25	.x'± 1'	CHK. Abel 20150428	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20150428	SIZE: A4	SCALE FREE SHEET 1 / 1 REV A0 V