


1 2 3 4 5 6 7 8

A B C D E F


A B C D E F

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.02.03	AJ
A1	Release To ECN20130307	2013.03.27	Seven



3.50±0.10

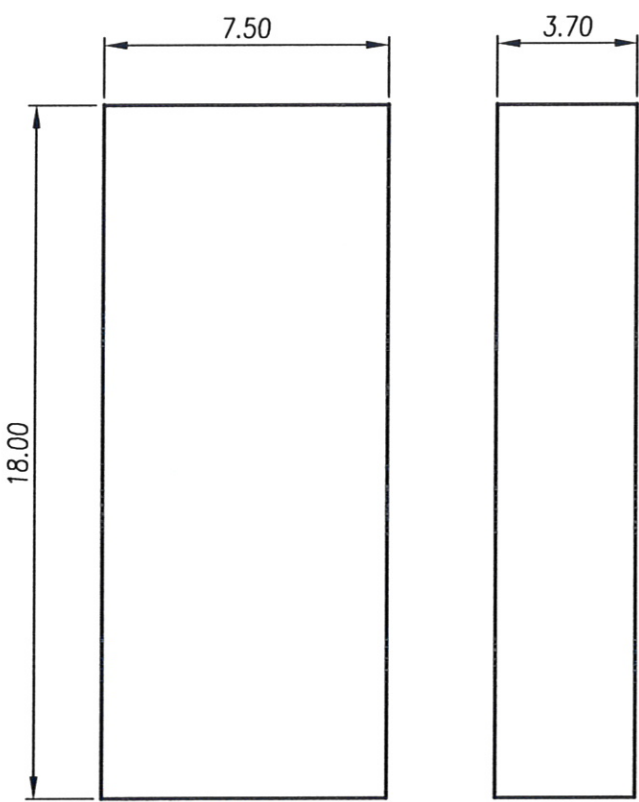

發行
102. 3. 28
文管中心

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:1400V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:3800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0


Finish:

1.Housing:White

Part No.:BC02601 02 1 2 B 3

Number of Pin	02	1	2	B	3	Packing
						B:Bag

Housing Material	1:PA66 UL94V-0	Housing Color	2:White
------------------	----------------	---------------	---------



金上達科技股份有限公司
GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 3.50mm Female 2P			
.x± 0.35	x.'± 2'	APR. Jay 20130327	PART NO. BC026010212B3		DWG NO. BC026010212B3	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130327	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130327	SIZE: A4	SCALE 5:1	SHEET 1 / 1 REV A1 V	

1 2 3 4 5 6 7 8