



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.10.01	Abel
A1	Release To ECN20130308	2013.03.25	Seven

Specification

- 1.Current Rating:2A AC/DC
- 2.Voltage Rating:250V AC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstanding Voltage:AC 800V/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0

Finish:





1.Housing:White

Part No.: BD06303 XX 1 2 B 4

Number of Pin 02~16 Packing B:Bag

Housing Material O:PA66 UL94V-0 White

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.00	5.20	10	18.00	21.20
03	4.00	7.20	11	20.00	23.20
04	6.00	9.20	12	22.00	25.20
05	8.00	11.20	13	24.00	27.20
06	10.00	13.20	14	26.00	29.20
07	12.00	15.20	15	28.00	31.20
08	14.00	17.20	16	30.00	33.20
09	16.00	19.20			

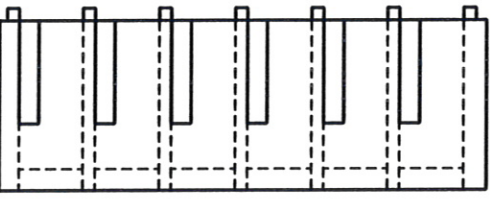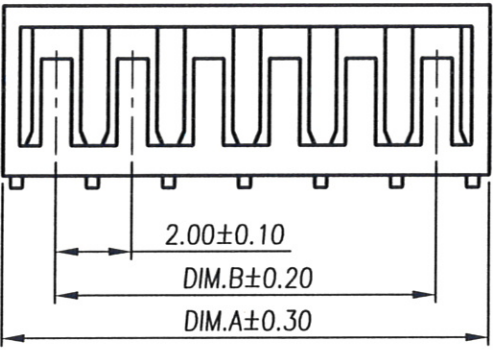

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 2.00mm 90° DIP Board In Type			
.x± 0.35	x.'± 2'	APR. Jay 20130325	PART NO. BD06303XX12B4		DWG NO. BD06303XX12B4	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 5:1	SHEET 1 / 1 REV A1 V	