

1 2 3 4 5 6 7 8



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2008.12.31	Abel
A1	Release To Modify DWG	2010.05.14	AJ
A2	Release To ECN20130308	2013.03.25	Seven

A

A

B

B

C

C

D




D

E

E

F

F

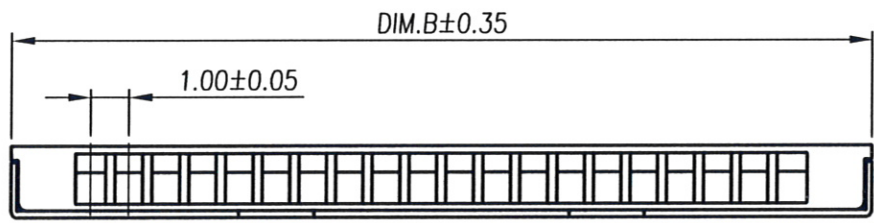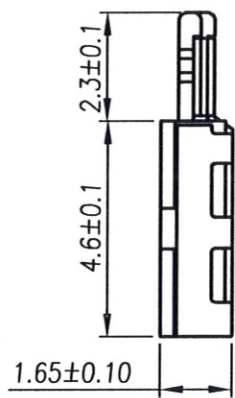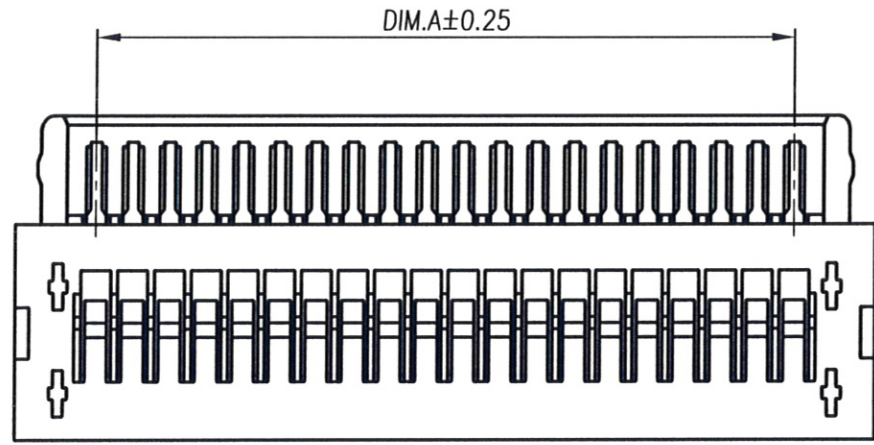

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:200V AC/DC
- 3.Contact Resistance:40mΩ Max.
- 4.Insulation Resistance:100MΩ Min. At DC 100V
- 5.Withstand Voltage:500V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

- 1.Housing:Thermoplastic UL94V-0
- 2.Shell:Copper Alloy

Finish:

- 1.Housing:Natural
- 2.Shell:Tin Plated

Part No.: BC08800 XX 3 1 B A

Number of Pin 20~30 Packing B:Bag

Housing Material 3:PA46 UL94V-0 Housing Color 1:Natural

Pin	DIM.A	DIM.B
20	19.0	23.3
30	29.0	33.3



金上達科技股份有限公司 GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 1.00mm Male 20~30P	
.x ± 0.35	x.' ± 2'	APR. Jay 20130325	PART NO. BC08800XX31BA	DWG NO. BC08800XX31BA
.xx ± 0.25	.x' ± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING
.xxx ± 0.15	.xx' ± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 5:1 SHEET 1 / 1 REV A2 V

1 2 3 4 5 6 7 8