

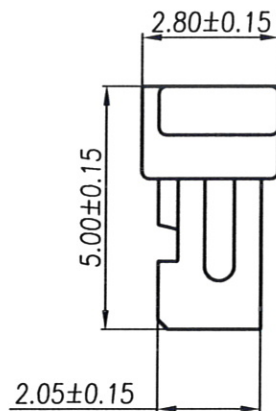


**RoHS Compliant**

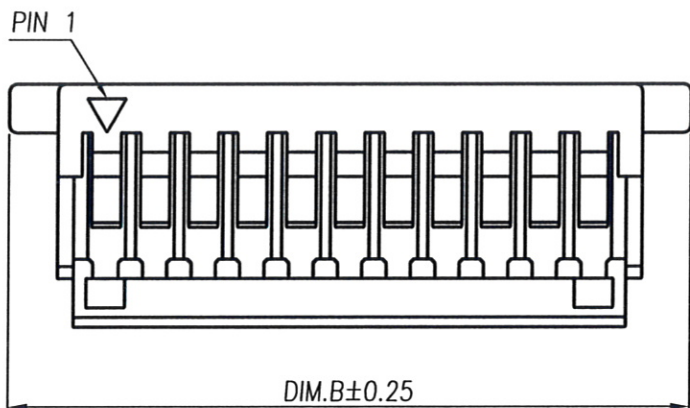

REV	MODIFICATION	DATE	DRAW
A1	Refer To ECN201103003	2011.03.11	Ivy
A2	Refer To ECN201111001	2011.10.03	Ivy
A3	Refer To ECN20130207	2013.02.25	Michelle

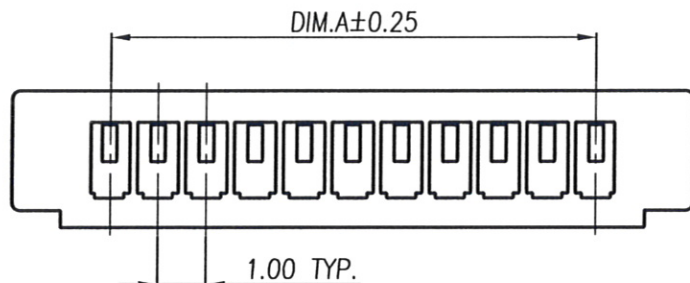

**Specification**

- 1.Current Rating:1A
- 2.Voltage Rating:50V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:100MΩ Min.
- 5.Dielectric Withstanding Voltage:AC 500V/Minute.
- 6.Operating Temperature:-25℃~85℃

**Material:**

1.Housing: Thermoplastic UL94V-0

**Finish:**

1.Housing:See P/N Option

Part No.: BC08600 XX X X B 2

Number of pin  
02~20

Packing  
B:Bag

Housing Material

Housing Color:  
1:Natural

6:PBT 94V-0 (H.F)

7:PBT 94V-0

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	1.00	5.00	07	6.00	10.00	12	11.00	15.00	17	16.00	20.00
03	2.00	6.00	08	7.00	11.00	13	12.00	16.00	18	17.00	21.00
04	3.00	7.00	09	8.00	12.00	14	13.00	17.00	19	18.00	22.00
05	4.00	8.00	10	9.00	13.00	15	14.00	18.00	20	19.00	23.00
06	5.00	9.00	11	10.00	14.00	16	15.00	19.00			

**金上達科技股份有限公司**  
**GOLDENSUNDA TECHNOLOGY CO.,LTD**

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJ.	TITLE: Wire To Board Housing 1.00mm			
.X± 0.35	.X'± 2'	APR. Jay 20130225	PART NO. BC08600XXXXB2		DWG NO. BC08600XXXXB2
.XX± 0.25	.X'± 1'	CHK. Seven 20130225	UNITS: mm	CUSTOMER DRAWING	
.XXX± 0.15	.XX'± 0.5'	DRA. Michelle 20130225	SIZE: A4	SCALE 1:1	SHEET 1 / 1 REV A3 V