


1 2 3 4 5 6 7 8




RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2010.03.30	AJ
A1	Release To ECN DIM. & SPEC	2010.05.27	AJ
A2	Release To ECN20130308	2013.03.25	Seven


A

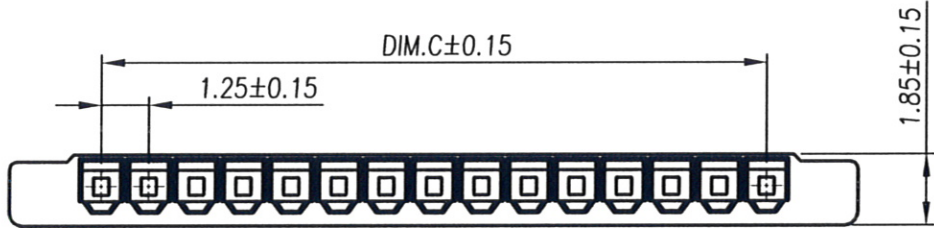


B

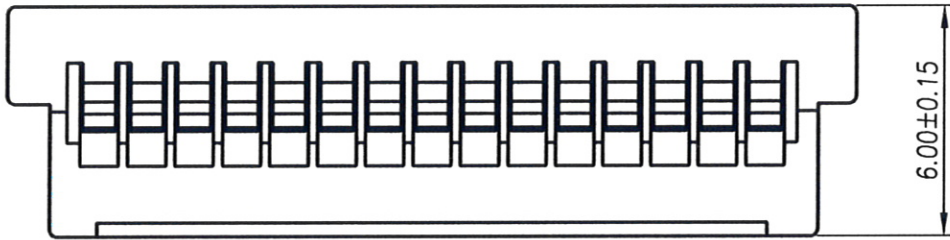

C

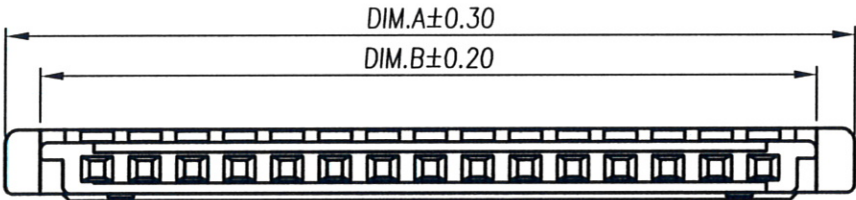

D



E

Pin	DIM.A	DIM.B	DIM.C	Pin	DIM.A	DIM.B	DIM.C
02	6.00	3.80	1.25	10	16.00	13.80	11.25
03	7.25	5.05	2.50	12	18.60	16.43	13.88
04	8.50	6.30	3.75	15	22.25	20.05	17.50
05	9.75	7.55	5.00	20	28.50	26.30	23.75
06	11.00	8.80	6.25	25	34.75	32.55	30.00
08	13.50	11.30	8.75	30	41.00	38.80	36.25

F



Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:50V AC/DC
- 3.Contact Resistance:50mΩ Max.
- 4.Insulation Resistance:500MΩ Min. At DC 500V
- 5.Withstand Voltage:150V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0

Finish:

1.Housing:Black

Part No.: BC07900 XX 1 3 B A

Number of Pin 02~30
Packing B:Bag

Housing Material 1:NY66 UL94V-0

Housing Color 3:Black



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 1.25mm Male 02~30P	
.x± 0.35	.x'± 2'	APR. Jay 20130325	PART NO. BC07900XX13BA	DWG NO. BC07900XX13BA
.xx± 0.25	.x'± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130325	SIZE: A4	
		SHEET 1 / 1		REV A2
				V

1 2 3 4 5 6 7 8