

1 2 3 4 5 6 7 8




RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Production	2009.08.28	Abel
A1	Release To Update Drawing	2010.05.13	AJ
A2	Release To ECN20130308	2013.03.25	Seven

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F

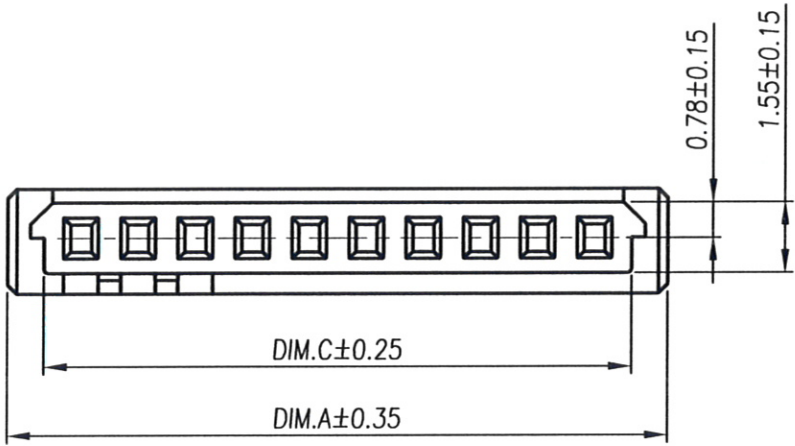



Specification  
 1.Current Rating:1A AC/DC  
 2.Voltage Rating:100V AC/DC  
 3.Contact Resistance:20mΩ Max.  
 4.Insulation Resistance:500MΩ Min. At DC 500V  
 5.Withstand Voltage:500V AC/Minute  
 6.Operating Temperature:-25°C~+85°C

Material:  
 1.Housing:High Temperature Thermoplastic UL94V-0


Finish:  
 1.Housing:Natural  
 Part No.: BC07800 XX 1 8 B A

Number of Pin 20~30  
 Packing B:Bag

Housing Material 1:NY66 UL94V-0  
 Housing Color 8:Natural

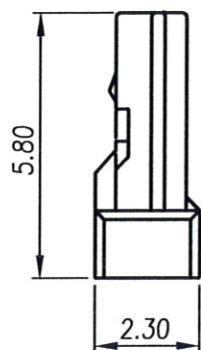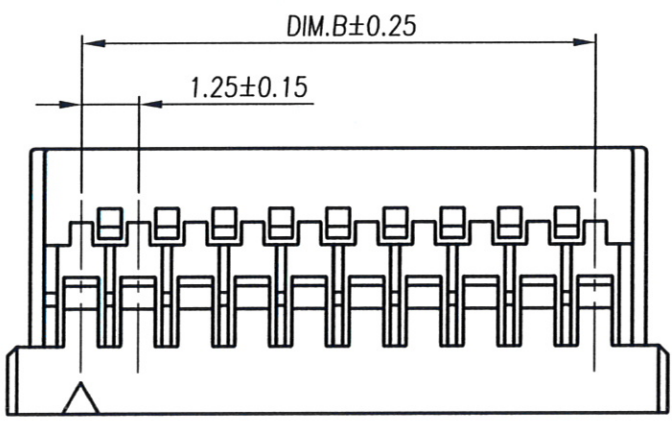

PIN	DIM.A	DIM.B	DIM.C
20	26.95	23.75	25.45
25	33.20	30.00	31.70
30	39.45	36.25	37.95



## 金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 1.25mm Male			
.x± 0.35	.x'± 2'	APR. Jay 20130325	PART NO. BC07800XX18BA		DWG NO. BC07800XX18BA	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130325	UNITS: mm	<b>CUSTOMER DRAWING</b>		
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130325	SIZE: <b>A4</b>	SCALE 6:1	SHEET 1 / 1 REV A2 V	

1 2 3 4 5 6 7 8