

1 2 3 4 5 6 7 8



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2011.09.23	Ivy
A1	Release To ECN20130308	2013.03.25	Seven

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:100V AC/DC
- 3.Contact Resistance:30mΩ Max.
- 4.Insulation Resistance:500MΩ Min. At DC 100V
- 5.Withstand Voltage:500V AC/Minute
- 6.Operating Temperature:-25°C~+105°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0

Finish:




1.Housing:Natural

Part No.:BC07700 XX 1 1 B A

Number of Pin 02~15 Packing B:Bag

Housing Material 1:NY66 UL94V-0

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	1.25	3.00	4.00	09	10.00	11.75	12.75
03	2.50	4.25	5.25	10	11.25	13.00	14.00
04	3.75	5.50	6.50	11	12.50	14.25	15.25
05	5.00	6.75	7.75	12	13.75	15.50	16.50
06	6.25	8.00	9.00	13	15.00	16.75	17.75
07	7.50	9.25	10.25	14	16.25	18.00	19.00
08	8.75	10.50	11.50	15	17.50	19.25	20.25

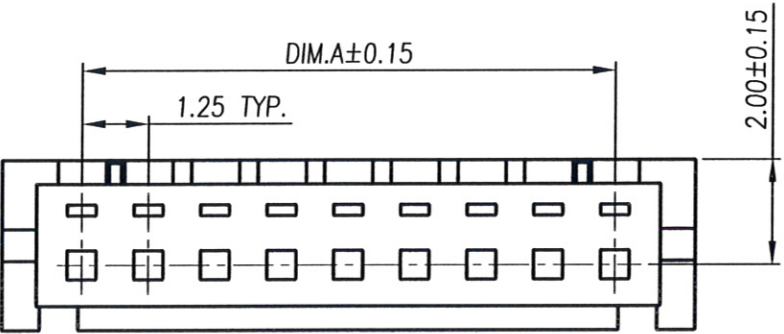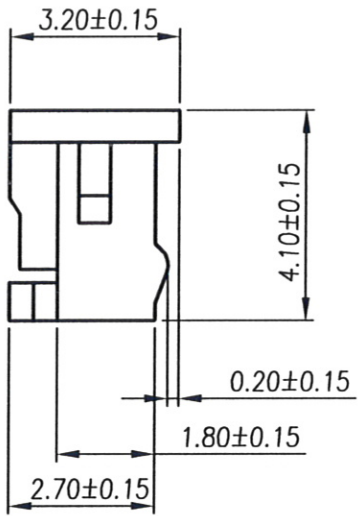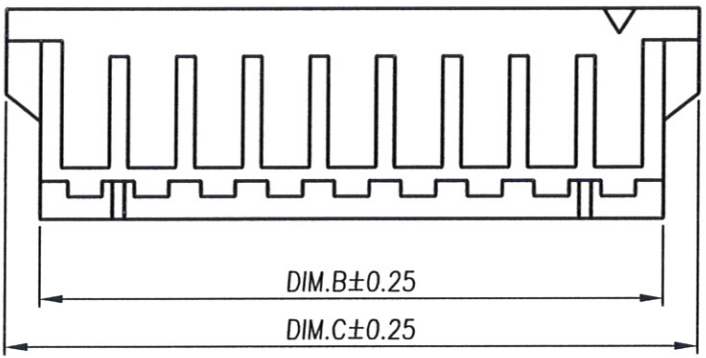

**金上達科技股份有限公司**  
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 1.25mm			
.x± 0.35	.x*± 2'	APR. Jay 20130325	PART NO. BC07700XX11BA		DWG NO. BC07700XX11BA	
.xx± 0.25	.x*± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx*± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 7:1	SHEET 1 / 1 REV A1 V	

1 2 3 4 5 6 7 8

A B C D E F

A B C D E F