

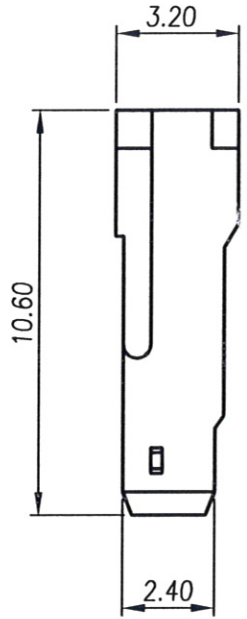


1 2 3 4 5 6 7 8

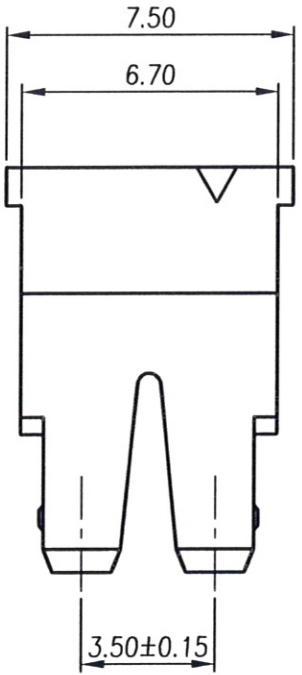

**RoHS Compliant**

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.02.03	AJ
A1	Release To ECN20130307	2013.03.27	Seven



**Specification**

- 1.Current Rating:10A AC/DC
- 2.Voltage Rating:1400V AC/DC
- 3.Contact Resistance:30mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:3800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

**Material:**

1.Housing:Thermoplastic UL94V-0

**Finish:**

1.Housing:White

Part No.:BC02600 02 1 2 B 3

Number of Pin 02 Packing B:Bag

Housing Material 1:PA66 UL94V-0 Housing Color 2:White

金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 3.50mm Male 2P	
.x± 0.35	x.'± 2'	APR. Jay 20130327	PART NO. BC026000212B3	DWG NO. BC026000212B3
.xx± 0.25	.x'± 1'	CHK. Michelle 20130327	CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130327	UNITS: mm	SCALE 5:1
		SIZE: <b>A4</b>	SHEET 1 / 1	REV A1 V

1 2 3 4 5 6 7 8

A  
B  
C  
D  
E  
F

A  
B  
C  
D  
E  
F