

1 2 3 4 5 6 7 8



RoHS Compliant



REV	MODIFICATION	DATE	DRAW
A3	Release To Product	2010.06.09	AJ
A4	Release To ECN20110501	2011.05.12	Seven
A5	Release To ECN20130308	2013.03.25	Seven

A

A

02~05P

06~15P

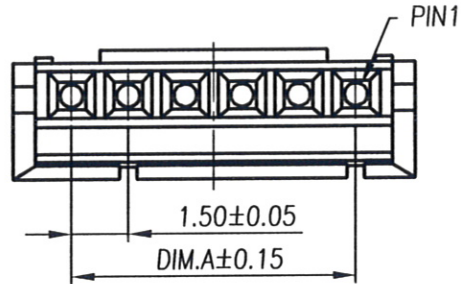

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:50V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:500MΩ Min. At DC 500V
- 5.Withstand Voltage:500V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0

Mated With & Use With :

1.CC0660000P1A4(Terminal)

Part No.: BC06600 XX 1 1 B 3

Number of Pin
02~15

Packing
B:Bag(1000pcs)




Housing Material
1:NY66 UL94V-0 Natural

B

B

C

C

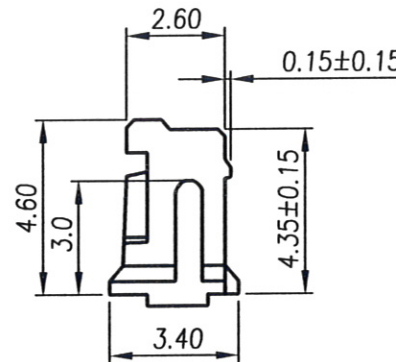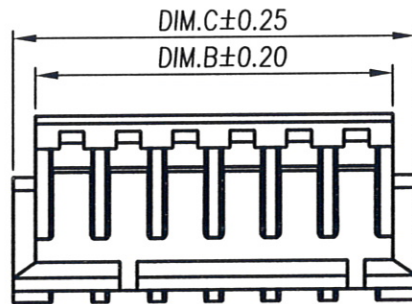



D

D

E

E

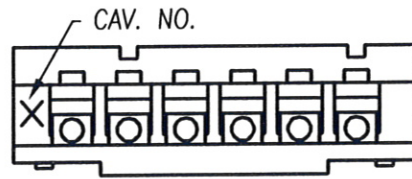

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	1.50	3.30	4.60	09	12.00	13.80	15.10
03	3.00	4.80	6.10	10	13.50	15.30	16.60
04	4.50	6.30	7.60	11	15.00	16.80	18.10
05	6.00	7.80	9.10	12	16.50	18.30	19.60
06	7.50	9.30	10.60	13	18.00	19.80	21.10
07	9.00	10.80	12.10	14	19.50	21.30	22.60
08	10.50	12.30	13.60	15	21.00	22.80	24.10

F

F



金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 1.50mm	
.x± 0.35	x.*± 2'	APR. Jay 20130325	PART NO. BC06600XX11B3	DWG NO. BC06600XX11B3
.xx± 0.25	.x.*± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15	.xx.*± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 5:1
		SHEET 1 / 1		REV A5
				V

1 2 3 4 5 6 7 8