
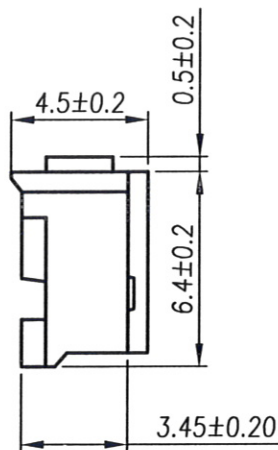

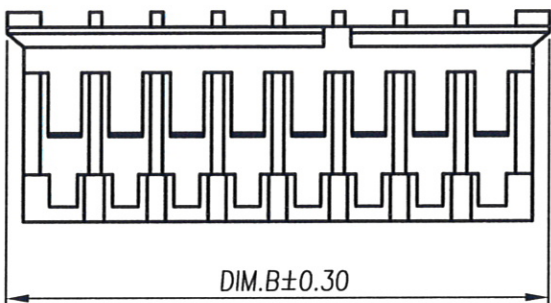


RoHS Compliant

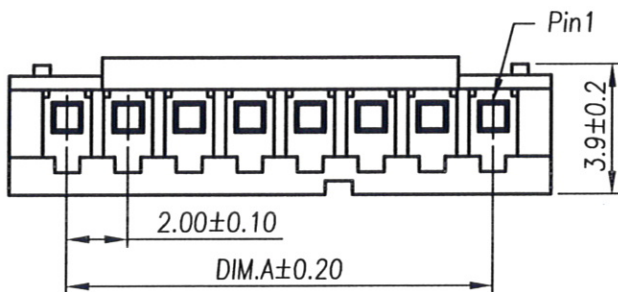


REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.04.08	AJ
A1	Release To ECN20130307	2013.03.27	Seven
A2	Release To ECN20130511	2013.05.23	Michelle

Specification
 1.Current Rating:2A
 2.Voltage Rating:100V AC/DC
 3.Contact Resistance:20mΩ Max.
 4.Insulation Resistance:1000MΩ Min. At DC 500V
 5.Dielectric Withstand Voltage:800V AC/Minute
 6.Operating Temperature:-25°C~+85°C

Material:
 1.Housing:Thermoplastic UL94V-0
 Finish:
 1.Housing:See P/N Option
 Part No.: BC05600 XX X X B 2
 Number of Pin 02~16
 Housing Material 1:PA66 UL94V-0
 C:PA66 UL94V-0 Halogen Free
 Packing B:Bag
 Housing Color 1:Natural
 2:Red
 3:Black
 5:Yellow
 6:Green
 7:Blue


PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.00	5.80	10	18.00	21.80
03	4.00	7.80	11	20.00	23.80
04	6.00	9.80	12	22.00	25.80
05	8.00	11.80	13	24.00	27.80
06	10.00	13.80	14	26.00	29.80
07	12.00	15.80	15	28.00	31.80
08	14.00	17.80	16	30.00	33.80
09	16.00	19.80			

02-05P無缺口
 06-10P一側缺口
 11-15P二側缺口
 16P三側缺口



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 2.00mm Male		
.x± 0.35	.x'± 2'	APR. Jay 20130523	PART NO. BC05600XXXXB2	DWG NO. BC05600XXXXB2	
.xx± 0.25	.x'± 1'	CHK. Seven 20130523	UNITS: mm CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20130523	SIZE: A4	SCALE 4:1	SHEET 1 / 1 REV A2 V