
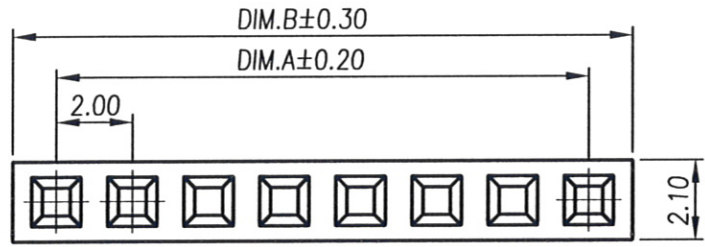


1 2 3 4 5 6 7 8

 **RoHS Compliant**

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2011.07.08	Seven
A1	Release To ECN20110801	2011.08.08	Ivy
A2	Release To ECN20130308	2013.03.25	Seven



Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:250V AC
- 3.Insulation Resistance:1000MΩ Min.
- 4.Dielectric Withstanding Voltage:AC 800V/Minute
- 5.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Temperature Thermoplastic UL94V-2



Finish:

1.Housing:Natural


Part No.: BC06100 XX 0 3 B 8

Number of Pin _____ Packing B:Bag
02~30


Housing Material _____
0:PA66 UL94V-2 Nature

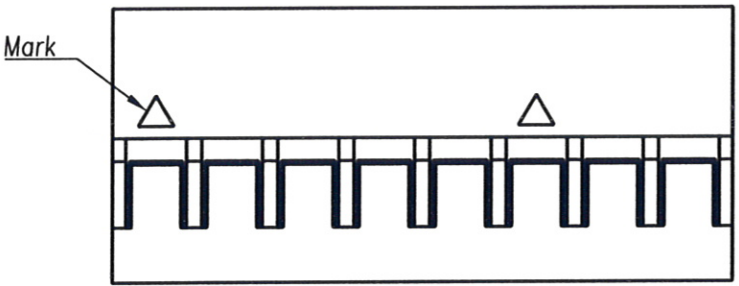


PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.00	4.30	12	22.00	24.30	22	42.00	44.35
03	4.00	6.30	13	24.00	26.30	23	44.00	46.35
04	6.00	8.30	14	26.00	28.30	24	46.00	48.35
05	8.00	10.30	15	28.00	30.30	25	48.00	50.35
06	10.00	12.30	16	30.00	32.35	26	50.00	52.35
07	12.00	14.30	17	32.00	34.35	27	52.00	54.35
08	14.00	16.30	18	34.00	36.35	28	54.00	56.35
09	16.00	18.30	19	36.00	38.35	29	56.00	58.35
10	18.00	20.30	20	38.00	40.35	30	58.00	60.35
11	20.00	22.30	21	40.00	42.35			

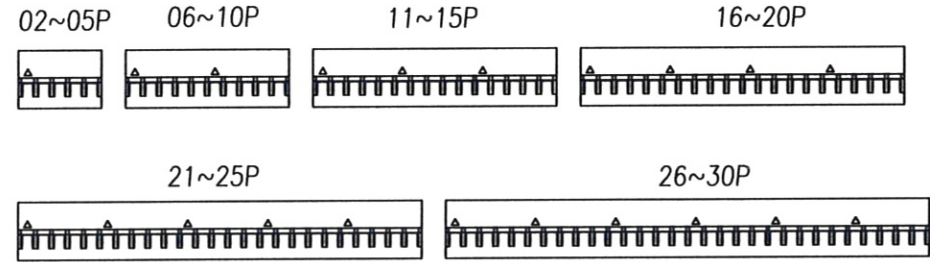

Appearance



金上達科技股份有限公司
GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 2.00mm		
.x± 0.35	x.'± 2'	APR. Jay 20130325	PART NO. BC06100XXX3B8	DWG NO. BC06100XXX3B8	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 5:1	SHEET 1 / 1 REV A2 V

1 2 3 4 5 6 7 8

A
B
C
D
E
F

A
B
C
D
E
F