

1 2 3 4 5 6 7 8



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.02.10	Abel
A1	Release To ECN20110414	2011.04.28	Seven
A2	Release To ECN20130308	2013.03.25	Seven

Specification

- 1.Current Rating:3A AC/DC Max.(AWG#22)
- 2.Voltage Rating:250V AC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min.
- 5.Dielectric Withstanding Voltage:AC 800V/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:High Temperature Thermoplastic UL94V-0
Finish:





1.Housing:Natural

Part No.: BC06400 XX 1 2 B 2

Number of Pin _____
02~15


Packing
B:Bag

Housing Material _____
1:PA66 UL94V-0 Natural

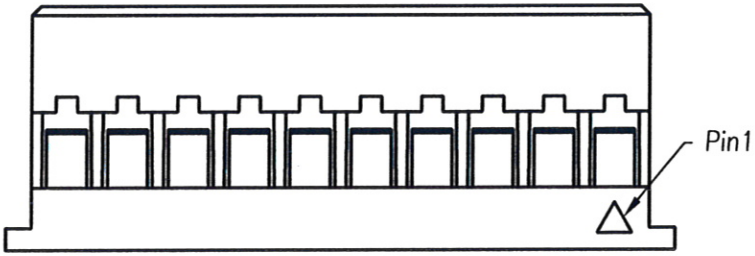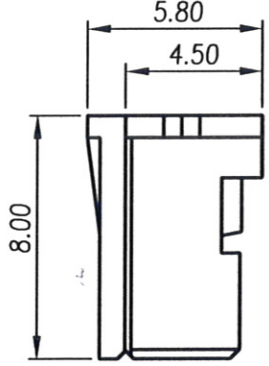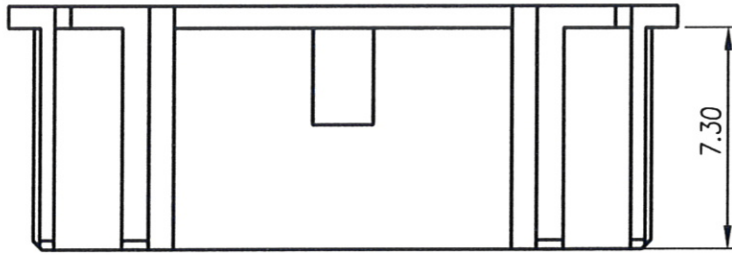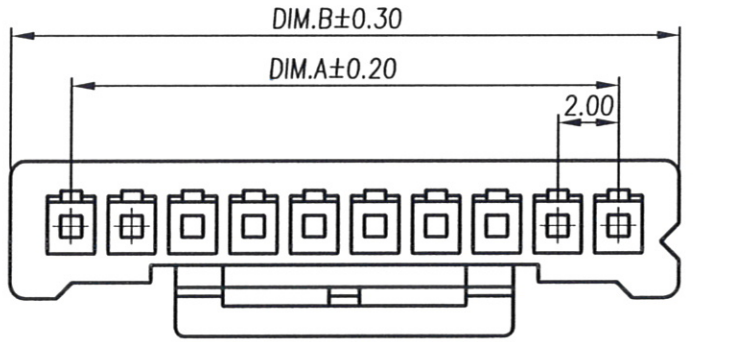


PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.00	6.00	07	12.00	16.00	12	22.00	26.00
03	4.00	8.00	08	14.00	18.00	13	24.00	28.00
04	6.00	10.00	09	16.00	20.00	14	26.00	30.00
05	8.00	12.00	10	18.00	22.00	15	28.00	32.00
06	10.00	14.00	11	20.00	24.00			





金上達科技股份有限公司
GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 2.00mm		
.x± 0.35	x.'± 2'	APR. Jay 20130325	PART NO. BC06400XX12B2	DWG NO. BC06400XX12B2	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130325	SIZE: A4	SCALE 4:1	SHEET 1 / 1 REV A2 V

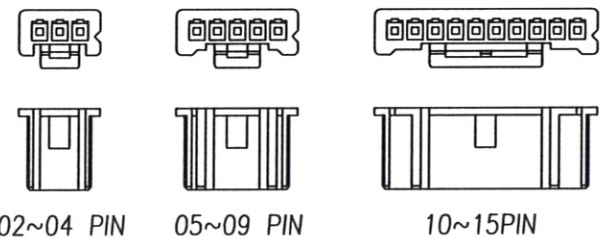

1 2 3 4 5 6 7 8