




RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.02.02	AJ
A1	Release To ECN20130308	2013.03.25	Seven

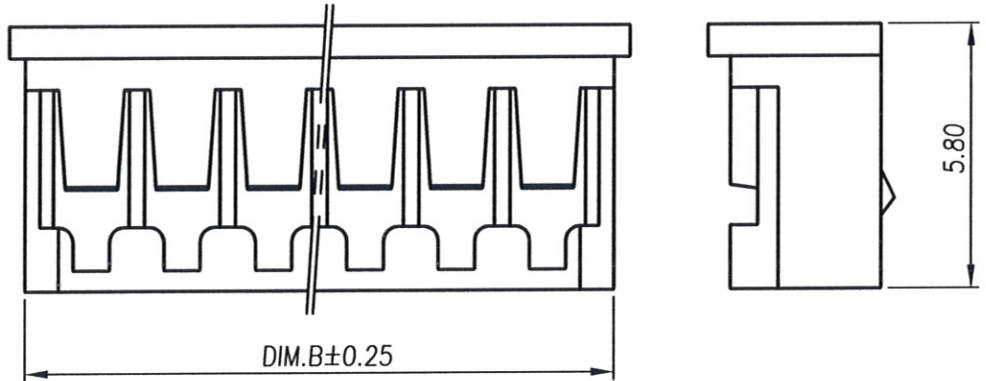

Specification

- 1.Current Rating:1.5A AC/DC
- 2.Voltage Rating:100V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C


Material:

- 1.Housing:High Temperature Thermoplastic UL94V-0
- Finish:
1.Housing:Natural(White)


Part No.: BCA1200 XX 1 2 B 3

Number of Pin 02~15 Packing 5:Bag

Housing Material 1:NY66 UL94V-0

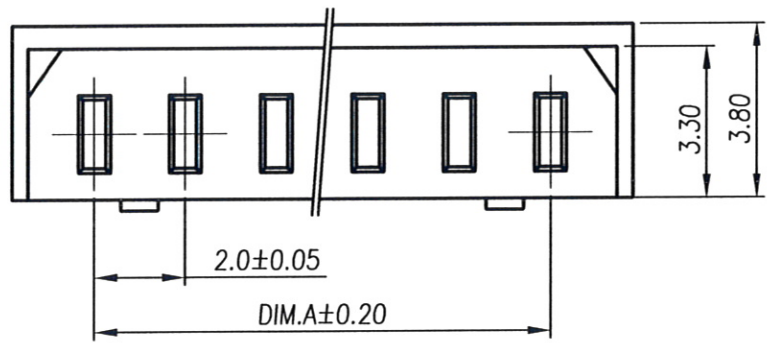


Pin	DIM.A	DIM.B	Pin	DIM.A	DIM.B
02	2.00	4.90	09	16.00	18.90
03	4.00	6.90	10	18.00	20.90
04	6.00	8.90	11	20.00	22.90
05	8.00	10.90	12	22.00	24.90
06	10.00	12.90	13	24.00	26.90
07	12.00	14.90	14	26.00	28.90
08	14.00	16.90	15	28.00	30.90



金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 2.00mm Single Row	
.x ± 0.35	.x' ± 2'	APR. Jay 20130325	PART NO. BCA1200XX12B3	DWG NO. BCA1200XX12B3
.xx ± 0.25	.x' ± 1'	CHK. Michelle 20130325	UNITS: mm	CUSTOMER DRAWING
.xxx ± 0.15	.xx' ± 0.5'	DRA. Seven 20130325	SIZE: A4	
		SHEET 1 / 1		REV A1 V