

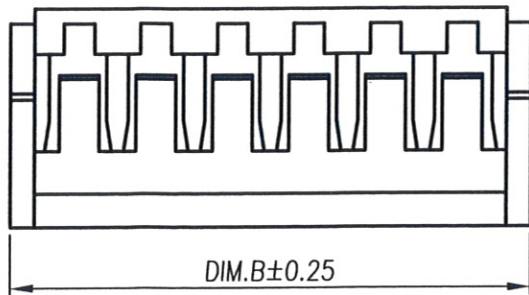


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2011.08.04	Ivy
A1	Release To ECN20130307	2013.03.27	Seven
A2	Release To ECN20140514	2014.05.23	Michelle

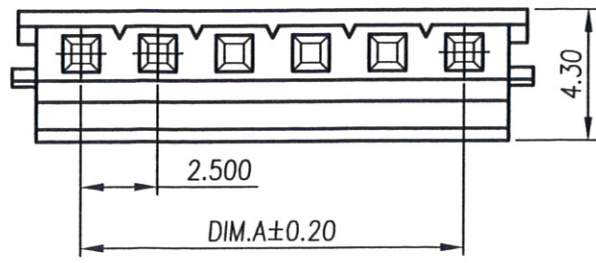

Specification

- 1.Current Rating:3A
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstand Voltage:800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0

Finish:

1.Housing:White

Part No.: BC04800 XX 1 2 B 2

Number of Pin
 $\triangle A2$ 02~10

Packing
 B:Bag

Housing Material
 1:PA66 UL94V-0

Housing Color
 2:White

$\triangle A2$

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	2.50	7.00	07	15.00	19.50
03	5.00	9.50	08	17.50	22.00
04	7.50	12.00	09	20.00	24.50
05	10.00	14.50	10	22.50	27.00
06	12.50	17.00			



		金上達科技股份有限公司 GOLDENSUND TECHNOLOGY CO.,LTD	
TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE: Wire To Board Housing 2.50mm Male Single Row	
.x± 0.35	x.± 2'	PROJ. APR. C.F.Liao 20140523	PART NO. BC04800XX12B2
.xx± 0.25	.x'± 1'	CHK. Abel 20140523	DWG NO. BC04800XX12B2
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20140523	UNITS: mm SCALE 4:1 SHEET 1 / 1 REV A2
		CUSTOMER DRAWING	
		SIZE: A4	V