


DIM.A & DIM.B TOLERANCE:  
 A3 01Pin~10Pin => ±0.20  
           11Pin~20Pin => ±0.25  
 A2 21Pin~30Pin => ±0.35  
 A2 31Pin~40Pin => ±0.45

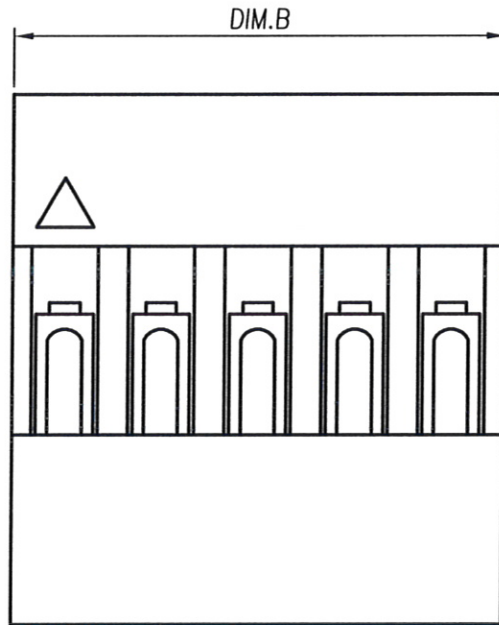

REV	MODIFICATION	DATE	DRAW
A1	ECN20120701	2012.07.04	Michelle
A2	Release To ECN20150410	2015.04.29	Michelle
A3	Release To ECN20151005	2015.10.12	Michelle

**RoHS Compliant**

Specification

- 1.Current Rating:3A
- 2.Voltage Rating:250V AC
- A3 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstanding Voltage:AC800V/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-1

Finish:

1.Housing:Black


Part No.:BC03700 XX G 3 B 8

No. Of Pin  
01~40


Packing  
B:Bag

Housing Material  
G:Noryl UL94V-1

Housing Color  
3:Black




PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
01	/	2.65	11	25.40	28.14	21	50.80	53.54	31	76.20	78.94
02	2.54	5.28	12	27.94	30.68	22	53.34	56.08	32	78.74	81.48
03	5.08	7.82	13	30.48	33.22	23	55.88	58.62	33	81.28	84.02
04	7.62	10.36	14	33.02	35.76	24	58.42	61.16	34	83.82	86.56
05	10.16	12.90	15	35.56	38.30	25	60.96	63.70	35	86.36	89.10
06	12.70	15.44	16	38.10	40.84	26	63.50	66.24	36	88.90	91.64
07	15.24	17.98	17	40.64	43.38	27	66.04	68.78	37	91.44	94.18
08	17.78	20.52	18	43.18	45.92	28	68.58	71.32	38	93.98	96.72
09	20.32	23.06	19	45.72	48.46	29	71.12	73.86	39	96.52	99.26
10	22.86	25.60	20	48.26	51.00	30	73.66	76.40	40	99.06	101.80



## 金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 2.54mm Single Row		
.x± 0.35	x.*± 2'	APR. C.F.Liao 20151012	PART NO. BC03700XXG3B8	DWG NO. BC03700XXG3B8	
.xx± 0.25	.x.*± 1'	CHK. Abel 20151012	UNITS: mm	CUSTOMER DRAWING	
.xxx± 0.15	.xx.*± 0.5'	DRA. Michelle 20151012	SIZE: A4	SCALE 5:1	SHEET 1 / 1
			REV A3	V	