

1 2 3 4 5 6 7 8



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.06.19	Abel
A1	Release To ECN20130307	2013.03.27	Seven

A



B

C

D

E

F

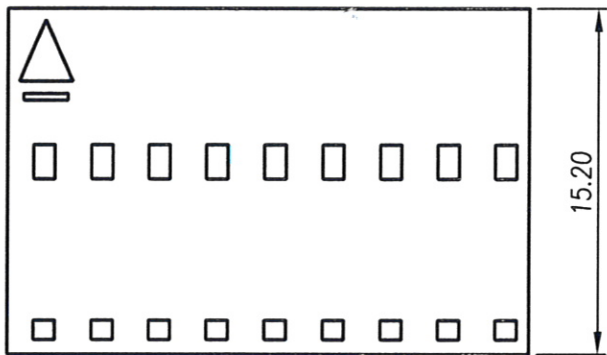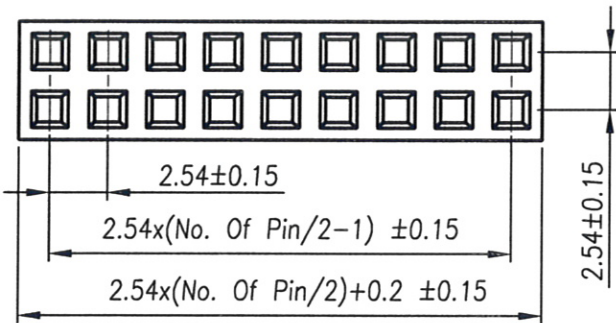

Specification

1. Current Rating: 3A
2. Voltage Rating: 250V AC/DC
3. Insulation Resistance: 1000MΩ Min.
4. Withstand Voltage: 1000V AC/Minute
5. Operating Temperature: -25°C ~ +85°C

Material:

1. Housing: Thermoplastic UL94V-0

Finish:

1. Housing: Black

Part No.: BC04000 XX E 3 B 8

Number of Pin: XX E 3 B 8
 Packing: B: Bag

Housing Material: E: PBTP UL94V-0
 Housing Color: 3: Black

A

B

C

D

E

F

1 2 3 4 5 6 7 8

		金上達科技股份有限公司 GOLDENSUNDA TECHNOLOGY CO., LTD	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	
TITLE: Wire To Board Housing 2.54mm Male		PART NO. BC04000XXE3B8	
DWG NO. BC04000XXE3B8		CUSTOMER DRAWING	
.x± 0.35 .x'± 2"		APR. Jay 20130327	
.xx± 0.25 .x'± 1"		CHK. Michelle 20130327	
.xxx± 0.15 .xx'± 0.5"		DRA. Seven 20130327	
UNITS: mm		SIZE: A4	
SCALE: 3:1		SHEET 1 / 1	
REV: A1		V	