

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	4.00	4.00	14	18.00	22.00
04	3.00	7.00	16	21.00	25.00
06	6.00	10.00	18	24.00	28.00
08	9.00	13.00	20	27.00	31.00
10	12.00	16.00	22	30.00	34.00
12	15.00	19.00	24	33.00	37.00

REV	MODIFICATION	DATE	DRAW
A0	Release To MA20150502	2015.05.05	Michelle

RoHS Compliant

Specification
 1.Current Rating:See Note1
 2.Voltage Rating:250V AC/DC
 3.Contact Resistance:10mΩ Max.
 4.Insulation Resistance:1000MΩ Min. At 500V
 5.Dielectric Withstanding Voltage:AC1500V/Minute
 6.Operating Temperature:-25°C~+85°C

Material:
 1.Housing:Thermoplastic UL94V-0

Finish:
 1.Housing:Black

Part No.: BC03100 XX 1 3 B Q
 No. Of Pin 02~24
 Housing Material 1:Nylon66 UL94V-0
 Packing B:Bag
 Color 3:Black

Note1: Wire Size And Current Rating

Wire Size	#20	#22	#24	#26	#28	#30
Ampere	5A	5A	4A	3A	2A	1A

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD



TOLERANCE UNLESS OTHERWISE SPECIFIED

.x± 0.35	x.'± 2'	APR. C.F.Liao 20150505	TITLE: Wire To Board & Wire Housing 3.00mm Male Dual Row	PART NO. BC03100XX13BQ	DWG NO. BC03100XX13BQ
.xx± 0.25	.x'± 1'	CHK. Abel 20150505	UNITS: mm	CUSTOMER DRAWING	
.xxx± 0.15	.xx'± 0.5'	DRA Michelle 20150505	SIZE: A4	SCALE 3:1	SHEET 1 / 2

REV A0 V


RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To MA20150502	2015.05.05	Michelle

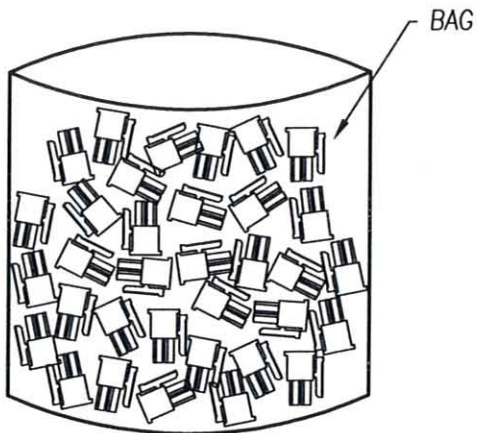



CONNECTOR INTO THE BAG


PIN	Q'TY
02,04,06,08	1000
10,12,14,16 18,20,22,24	500

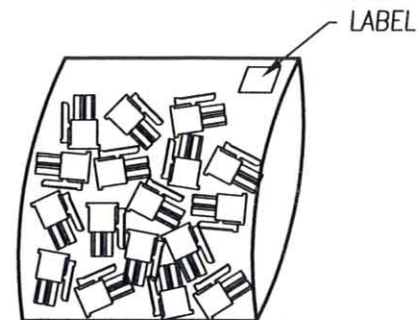

SEAL THE BAG



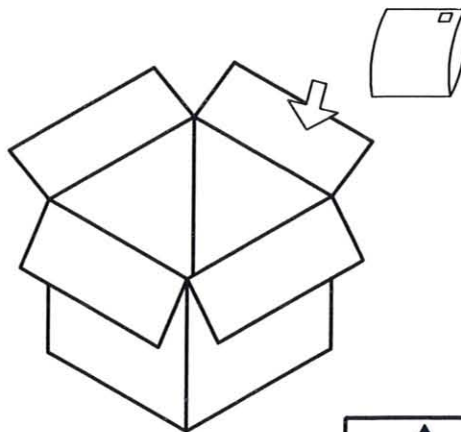

CLOSE CARTON WITH TAPE.



INTO THE CARTON, QT'Y BY OTHER.



 金上達科技股份有限公司 GOLDENSUNDA TECHNOLOGY CO.,LTD		TITLE: Wire To Board & Wire Housing 3.00mm Male Dual Row			
		PROJ. 	PART NO. BC03100XX13BQ		DWG NO. BC03100XX13BQ
TOLERANCE UNLESS OTHERWISE SPECIFIED	APR. C.F.Liao 20150505	UNITS: mm		CUSTOMER DRAWING	
.x± 0.35 x.'± 2' .xx± 0.25 .x'± 1' .xxx± 0.15 .xx'± 0.5'	CHK. Abel 20150505	SIZE: A4	SCALE: Free		
DRAW Michelle 20150505		SHEET 2 / 2	REV A0	V	