

REV	MODIFICATION	DATE	DRAW
A0	Release To MA20130808	2013.08.23	Michelle

RoHS Compliant

Specification

- 1.Current Rating:5A AC/DC
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min At DC 500V
- 5.Dielectric Withstanding Voltage:1500 VAC/Minute
- 6.Operating Temperature:-40°C~+105°C


Material:


- 1.Housing:High Temperature Thermoplastic UL94V-0
- 2.Contact Pin:Copper Alloy T=0.20mm

Finish:

- 1.Housing: Black
- 2.Contact Pin:Bright Tin Plated Over Nickel.


Part No.: WTAJM-10010-XX 0 4 1

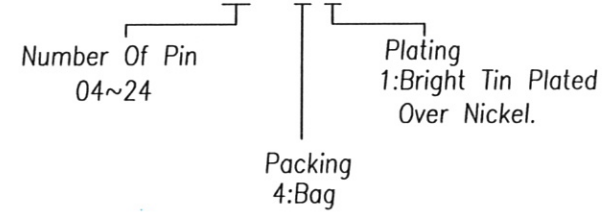



金上達科技股份有限公司

GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Wafer 3.00mm 180' DIP Dual Row			
.x± 0.35	x.± 2'	APR. Jay 20130823	PART NO. WTAJM-10010-XX041		DWG NO. WTAJM-100-C-01	
.xx± 0.25	.x'± 1'	CHK. Seven 20130823	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Michelle 20130823	SIZE: A4	SCALE None	SHEET 1 / 1	
			REV A0	V		