



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.09.11	AJ
A1	Release To ECN20110809	2011.09.09	Ivy
A2	Release To ECN20130307	2013.03.27	Seven

Specification

- 1.Current Rating:7A AC/DC
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:1500V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

- 1.Housing:Thermoplastic UL94V-2

Finish:


- 1.Housing:Transparent White

Part No.:BC02100 XX 0 4 B 2

Number of Pin Packing
02~16 B:Bag


Housing Material Housing Color
0:PA66 UL94V-2 4:Transparent White

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	3.96	8.45	10	35.64	40.11
03	7.92	12.39	11	39.60	44.07
04	11.88	16.35	12	43.56	48.03
05	15.84	20.31	13	47.52	51.99
06	19.80	24.27	14	51.48	55.95
07	23.76	28.23	15	55.44	59.91
08	27.72	32.19	16	27.72	32.19
09	31.68	36.15			

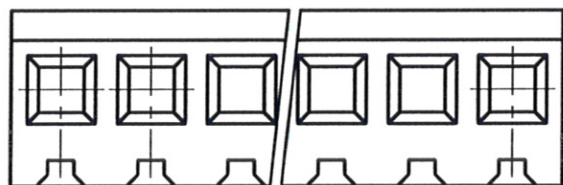


3.96±0.15

DIM.A±0.25

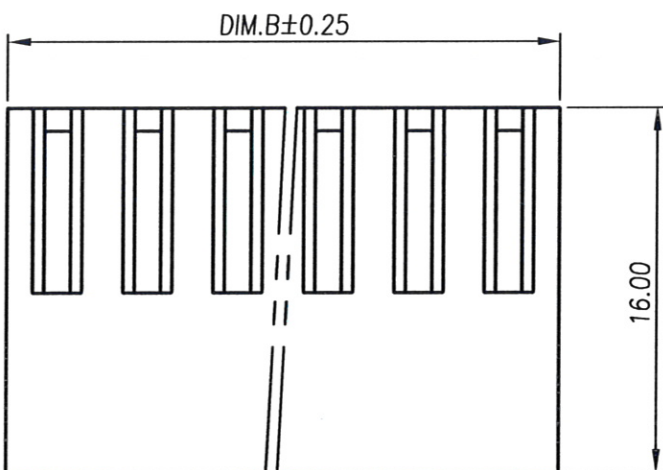

DIM.B±0.25

16.00

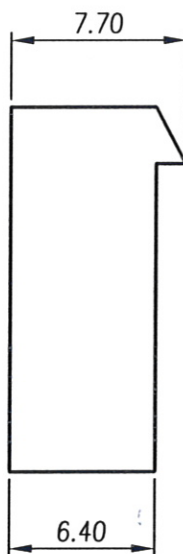

7.70

6.40

金上達科技股份有限公司
GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 3.96mm			
.x± 0.35	x.'± 2'	APR. Jay 20130327	PART NO. BC02100XX04B2		DWG NO. BC02100XX04B2	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130327	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130327	SIZE: A4	SCALE 3:1	SHEET 1 / 1 REV A2 V	