

1 2 3 4 5 6 7 8

 **RoHS Compliant**

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2009.09.04	Abel
A1	Release To ECN20130307	2013.03.27	Seven



Specification

- 1.Current Rating:7A AC/DC
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:30mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:1500V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

- 1.Housing:Thermoplastic UL94V-0

Finish:

- 1.Housing:White




Part No.: BC02200 XX 1 1 B 2


Number of Pin 02~14

Housing Material 1:PA66 UL94V-0


Packing B:Bag
Housing Color 1:White

PIN	DIM.A	DIM.B	PIN	DIM.A	DIM.B
02	3.96	8.12	09	31.68	35.84
03	7.92	12.08	10	35.64	39.80
04	11.88	16.04	11	39.60	43.76
05	15.84	20.00	12	43.56	47.72
06	19.80	23.96	13	47.52	51.68
07	23.76	27.90	14	51.48	55.64
08	27.72	31.88			

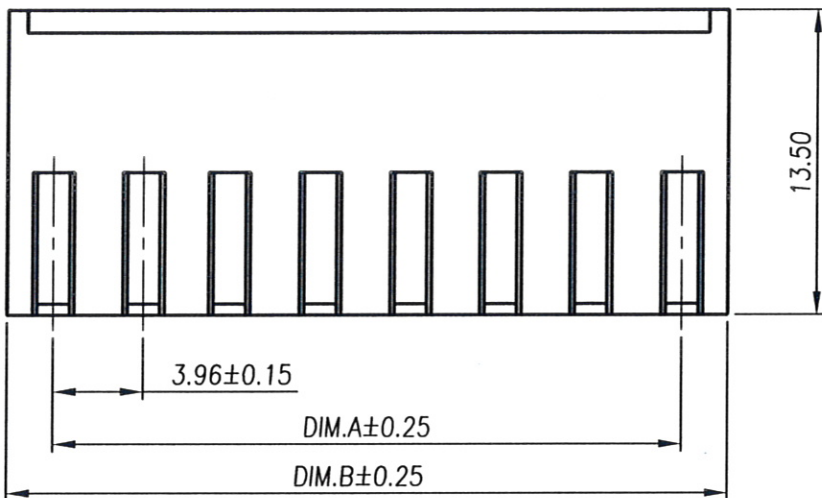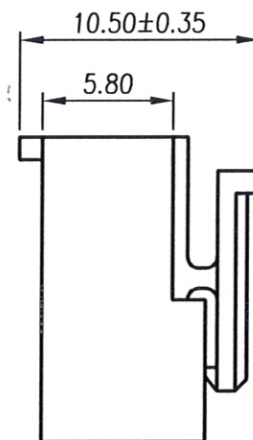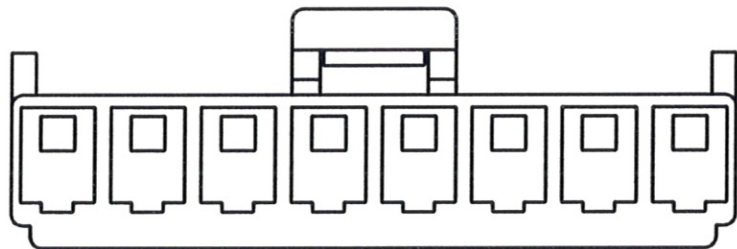



金上達科技股份有限公司
GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ. 	TITLE: Wire To Board Housing 3.96mm Male			
.x± 0.35	x.'± 2'	APR. Jay 20130327	PART NO. BC02200XX11B2		DWG NO. BC02200XX11B2	
.xx± 0.25	.x'± 1'	CHK. Michelle 20130327	UNITS: mm	CUSTOMER DRAWING		
.xxx± 0.15	.xx'± 0.5'	DRA. Seven 20130327	SIZE: A4	SCALE 3:1	SHEET 1 / 1	
			REV A1	V		

1 2 3 4 5 6 7 8

A

B

C

D

E

F

A

B

C

D

E

F