
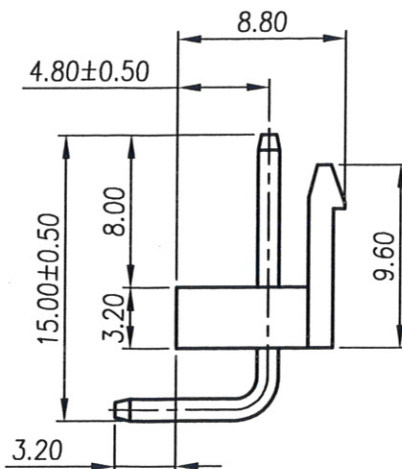


RECOMMENDED PCB LAYOUT  
(TOLERANCE: ±0.05)



RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To MA20131005	2013.10.15	Michelle

Specification

- 1.Current Rating:5A
- 2.Voltage Rating:250V AC/DC
- 3.Contact Resistance:10mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Dielectric Withstanding Voltage:1500 VAC/Minute
- 6.Operating Temperature:-25℃~+85℃

Material:

- 1.Housing:Thermoplastic UL94V-0
- 2.Contact Pin:Copper Alloy SQ Pin 1.14mm

Finish:

- 1.Housing:Natural
- 2.Contact Pin:Bright Tin Plated Over Nickel.

Part No.: WTAMM-21001-XX 0 4 1

Number Of Pin: 02~10,12  
Packing: 4:Bag  
Plating: 1:Bright Tin Plated Over Nickel.

PIN	DIM.A	DIM.B	DIM.C	PIN	DIM.A	DIM.B	DIM.C
02	3.96	8.04	5.52	07	23.76	27.84	25.32
03	7.92	12.00	9.48	08	27.72	31.80	29.28
04	11.88	15.96	13.44	09	31.68	35.76	33.24
05	15.84	19.92	17.40	10	35.64	39.72	37.20
06	19.80	23.88	21.36	12	43.56	47.64	45.12

**金上達科技股份有限公司**  
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Wafer 3.96mm 90° DIP Single Row		
.X ± 0.35	X' ± 2'	APR. Jay 20131015	PART NO. WTAMM-21001-XX041		DWG NO. WTAMM-210-C-01
.XX ± 0.25	.X' ± 1'	CHK. Seven 20131015	UNITS: mm	CUSTOMER DRAWING	
.XXX ± 0.15	.XX' ± 0.5'	DRW. Michelle 20131015	SIZE: A4	SCALE 2.5:1	SHEET 1 / 1
			REV A0	V	