

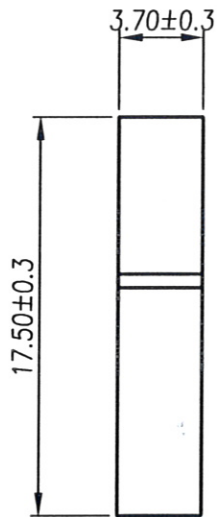


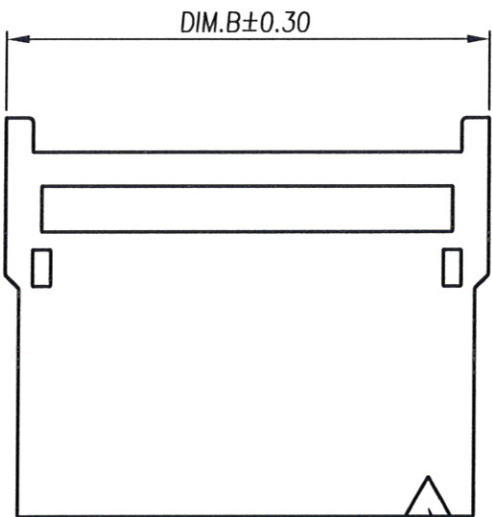

RoHS Compliant

REV	MODIFICATION	DATE	DRAW
A0	Release To Product	2010.06.10	AJ
A1	Release To ECN20130307	2013.03.27	Seven

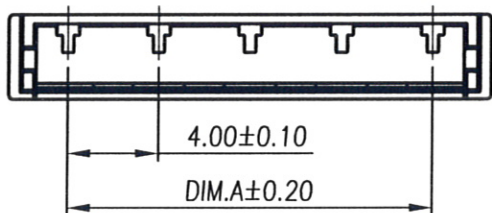

Specification

- 1.Current Rating:1A AC/DC
- 2.Voltage Rating:600V AC/DC
- 3.Contact Resistance:20mΩ Max.
- 4.Insulation Resistance:1000MΩ Min. At DC 500V
- 5.Withstand Voltage:1800V AC/Minute
- 6.Operating Temperature:-25°C~+85°C

Material:

1.Housing:Thermoplastic UL94V-0

Finish:

1.Housing:Natural


Part No.:BC01701 XX 7 2 B 3

Number of Pin 02~05 Packing B:Bag

Housing Material 7:NY66 UL94V-0 Housing Color 2:Natural



Pin	DIM.A	DIM.B
02	4.00	9.20
03	8.00	13.20
04	12.00	17.20
05	16.00	21.20



## 金上達科技股份有限公司

GOLDENSUND TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED		PROJ.	TITLE: Wire To Board Housing 4.0mm			
.x± 0.35	x.*± 2'	APR. Jay 20130327	PART NO. BC01701XX72B3		DWG NO. BC01701XX72B3	
.xx± 0.25	.x*± 1'	CHK. Michelle 20130327	UNITS: mm	<b>CUSTOMER DRAWING</b>		
.xxx± 0.15	.xx*± 0.5'	DRA. Seven 20130327	SIZE: <b>A4</b>	SCALE 3:1	SHEET 1 / 1 REV A1 V	