
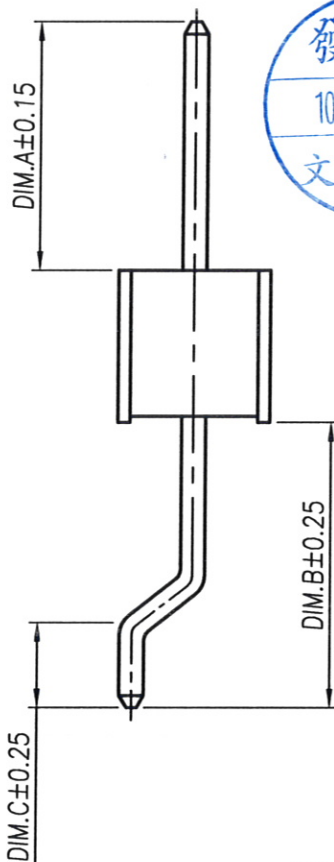


RECOMMENDED P.C.B LAYOUT
(Tolerance:±0.05)

RoHS Compliant



REV	MODIFICATION	DATE	DRAW
A0	Release To FAI20110279	2011.03.01	Ivy
A1	Release To ECN20130311	2013.04.15	Michelle

Specification

- 1.Current Rating:1A AC/DC
- 2.Contact Resistance:20mΩ Maximum
- 3.Insulation Resistance:5000MΩ Minimum
- 4.Dielectric Withstanding Voltage:AC 1000V/Minute
- 5.Operating Temperature:-55°C~+105°C

Material:

- 1.Housing:High Temp. Thermoplastic UL94V-0
- 2.Contact:Copper Alloy SQ. Pin 0.40mm

Finish:

- 1.Housing:Black
- 2.Contact:Gold Flash Over Nickel.

Part No.: ES001C9 XX 4 3 0 P

Number of Pin 02~50 Packing 0:BOX

Housing Material 4:NY6T UL94V-0 Black Plating 3:Gold Flash Over Nickel.

P/N	DIM.A	DIM.B	DIM.C
ES001C9XX430P	4.10	4.70	1.40

金上達科技股份有限公司
GOLDENSUNDA TECHNOLOGY CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED	PROJ.	TITLE: Pin Header 1.27mm 90° SMT S/R	
.x± 0.35 x.* 2'	APR. Jay 20130415	PART NO. ES001C9XX430P	DWG NO. ES001C9XX430P
.xx± 0.25 .x.* 1'	CHK. Seven 20130415	UNITS: mm	CUSTOMER DRAWING
.xxx± 0.15 .xx.* 0.5'	DRW. Michelle 20130415	SIZE: A4	SCALE 8:1 SHEET 1 / 1 REV A1 V